What is the most useful radon mitigation tool that you own?

What if your floor plan became your most useful diagnostic tool?

DRAW THE HOME
BEFORE YOU MITIGATE THE HOME



A floor plan is not just a standard requirement…

It is a working tool for the entire project.

Diagnose better: test points, PFE data, foundation zones, materials, and observations in context.

Design better: suction points, pipe routes, fan selection, and phasing based on mapped evidence.

Communicate better: show the customer what you found and what you plan to do.

Document better: keep installation data and callback information tied to the house.




The drawing becomes the backbone of the job.


DIAGNOSTICS:


PFE Data, Radon Grab Samples, Foundation Zones, Footings, Building Materials, Soil Type, Foundation Drains, Odd Things…Whatever Might Impact The Radon Mitigation System

DESIGN:

Pipe Runs, System Type(s), System Location (Exterior vs Interior), Points to Seal/Caulk, Number and Location of Suction Points, PFE Data, etc.

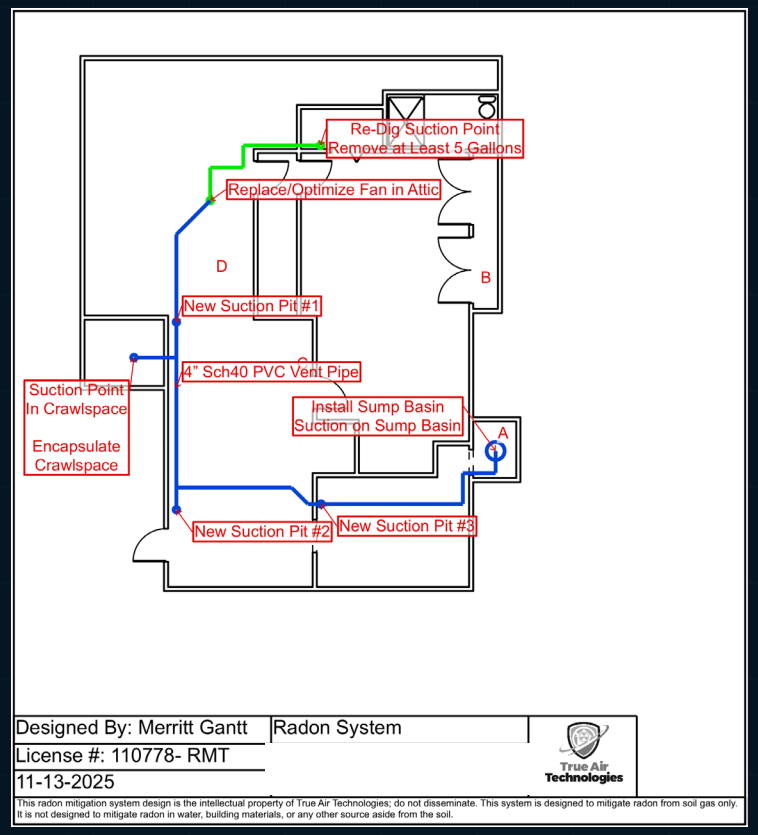


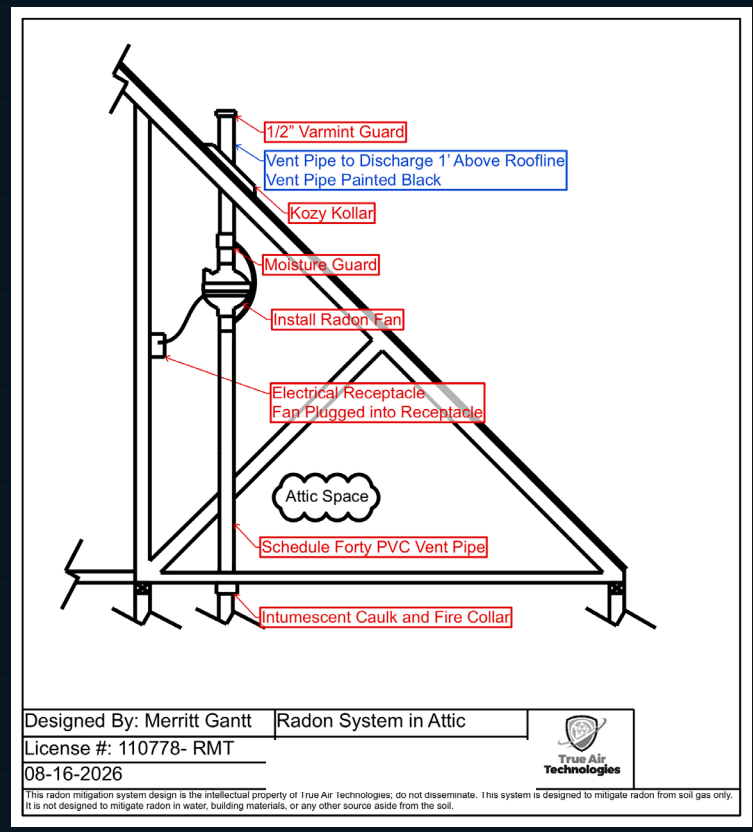


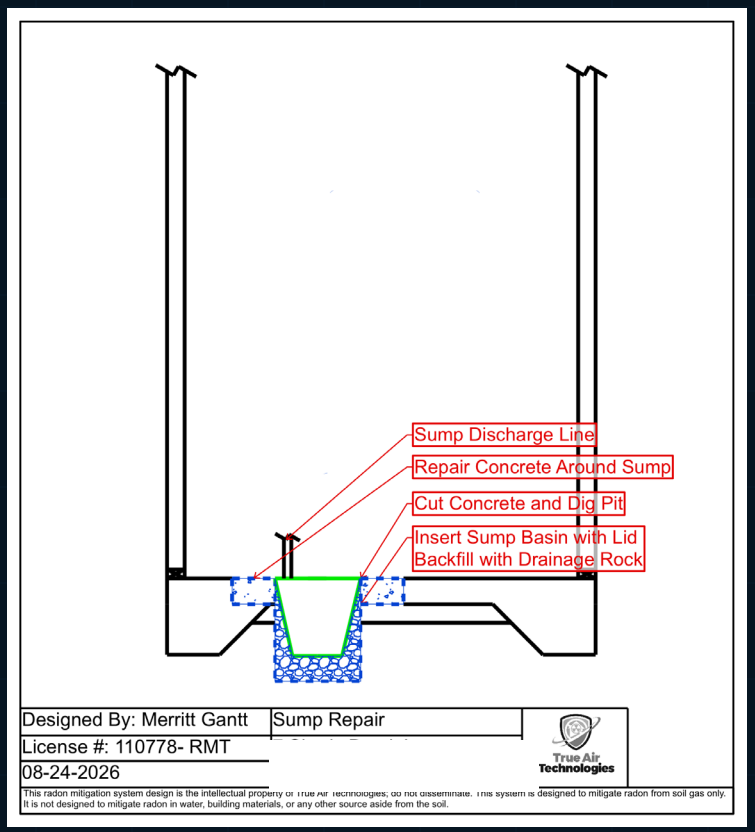

COMMUNICATE:

This is where your project goes from a house that you are looking at…to a home you are fixing!
This is your opportunity to present to the customer, your findings, and how you plan to fix it.

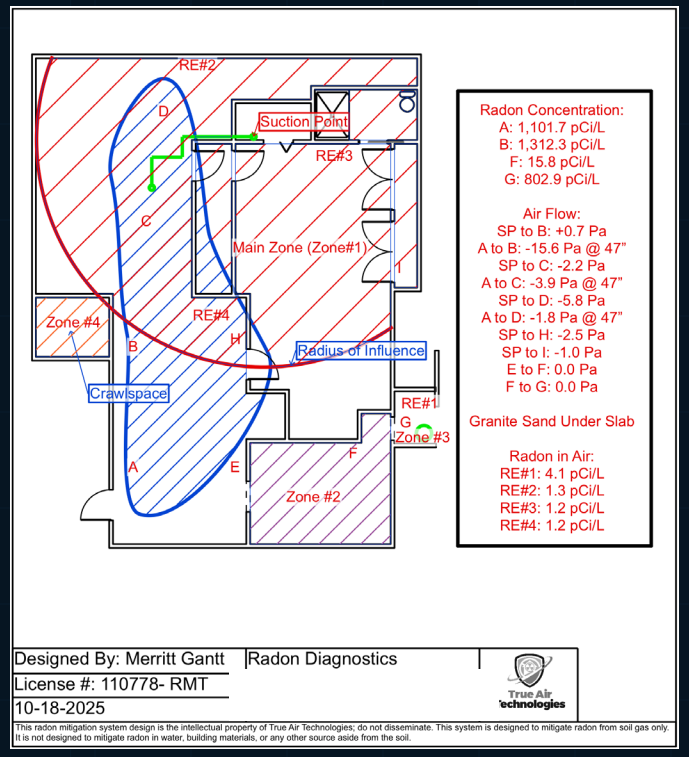

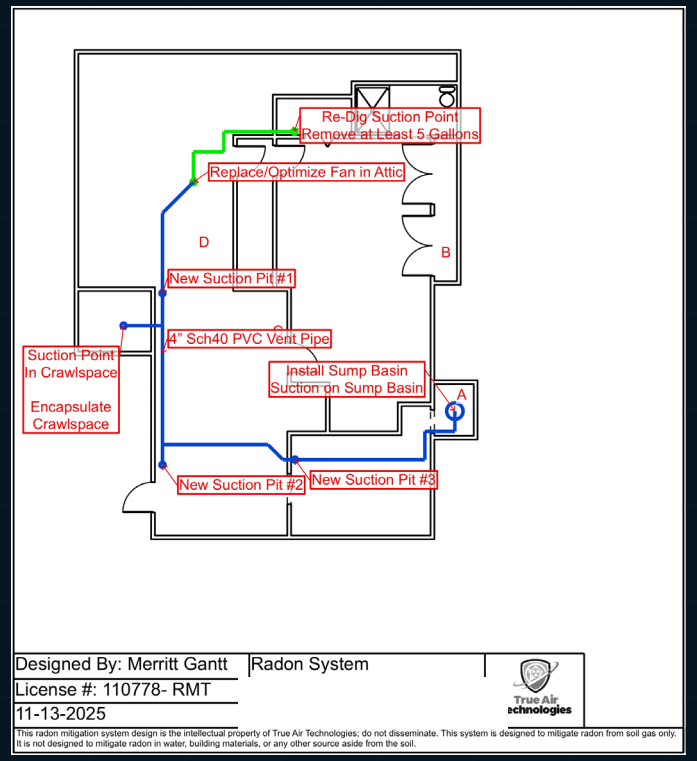



The drawing shows the homeowner what you found, what you recommend, and why.

FOUND
Here is where radon is likely entering… There is a footing under the slab…

REASON
We need X,Y,Z Radon System…And, Here's Why…


PLAN
Here is exactly what we plan to install...



A drawing turns an invisible problem into something the customer can see.

DOCUMENT:

- Job Notes/Observations (SP 1: 5 Gallons Drainage Rock), PFE Data, etc.
- OMM Plans
- Call Backs, Fan Failures, High Radon…Future You Will Thank You

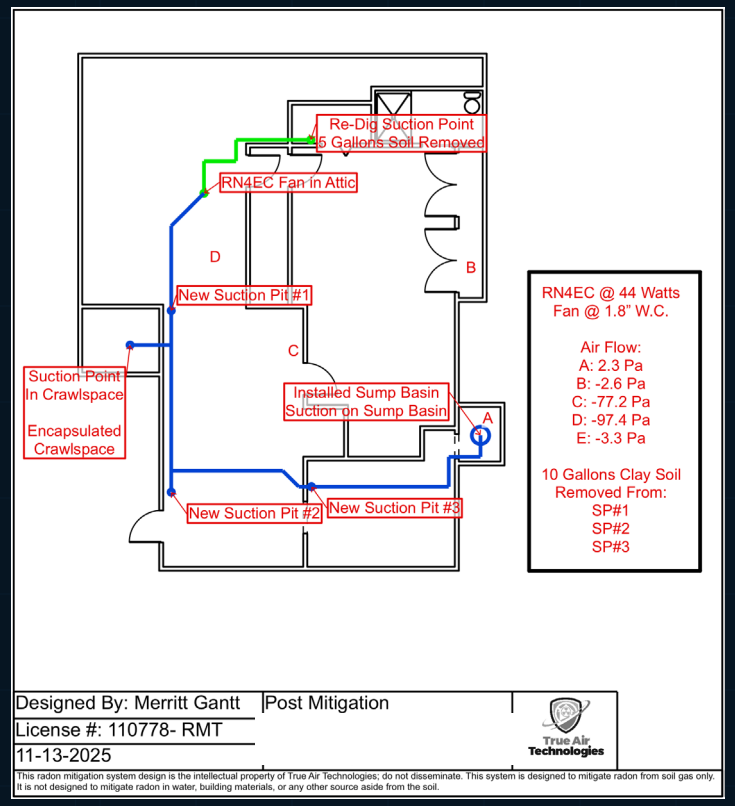



"What did I do again"



Years later, the drawing preserves the diagnostic data, installation details, and system performance.

CALLBACK WITHOUT A DRAWING

“I think we had a fan in the attic… maybe one suction point… I don’t remember what the pressure was.”

Memory fades.


CALLBACK WITH A DRAWING


RN4EC @ 44 watts
Fan @ 1.8" w.c.
Re-dug original SP: 5 gallons removed
SP#1–#3: 10 gallons clay removed
Post-mitigation PFE: A–E recorded

The drawing is the institutional memory of the job.

TROUBLESHOOT:

Ever Needed Help on a Project/Difficult Home?

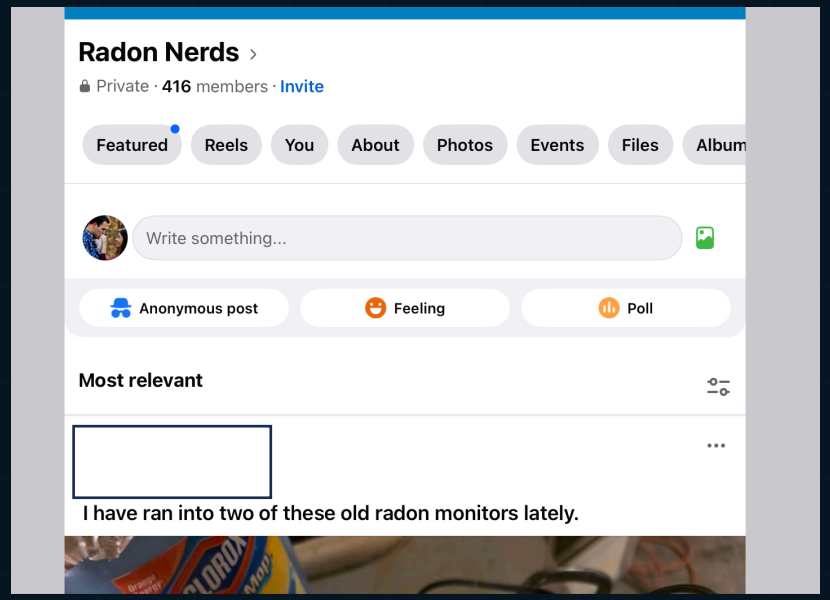

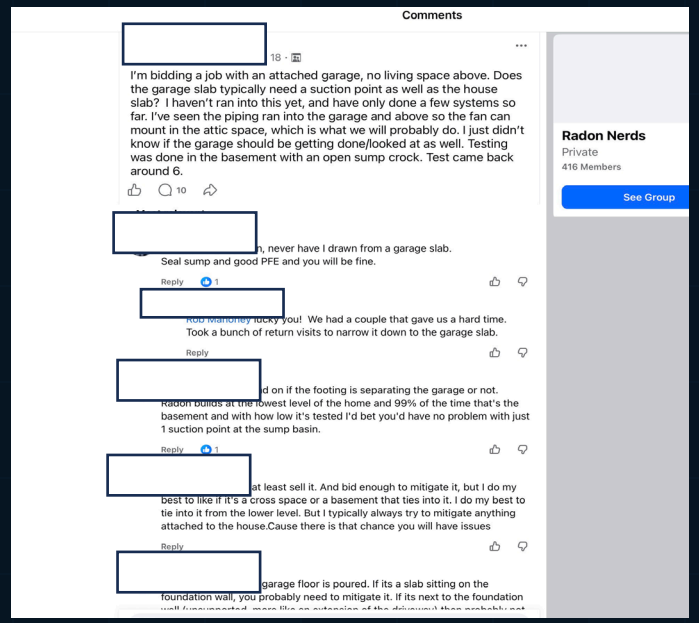



"I Don't Even Know Where to Start"

A good drawing lets other professionals understand the project quickly.


Solves the “crickets” problem

“What does your PFE look like?”


“What are the foundation zones?”

“Where are the footings?”

You cannot collaborate on information you didn’t record and don’t remember

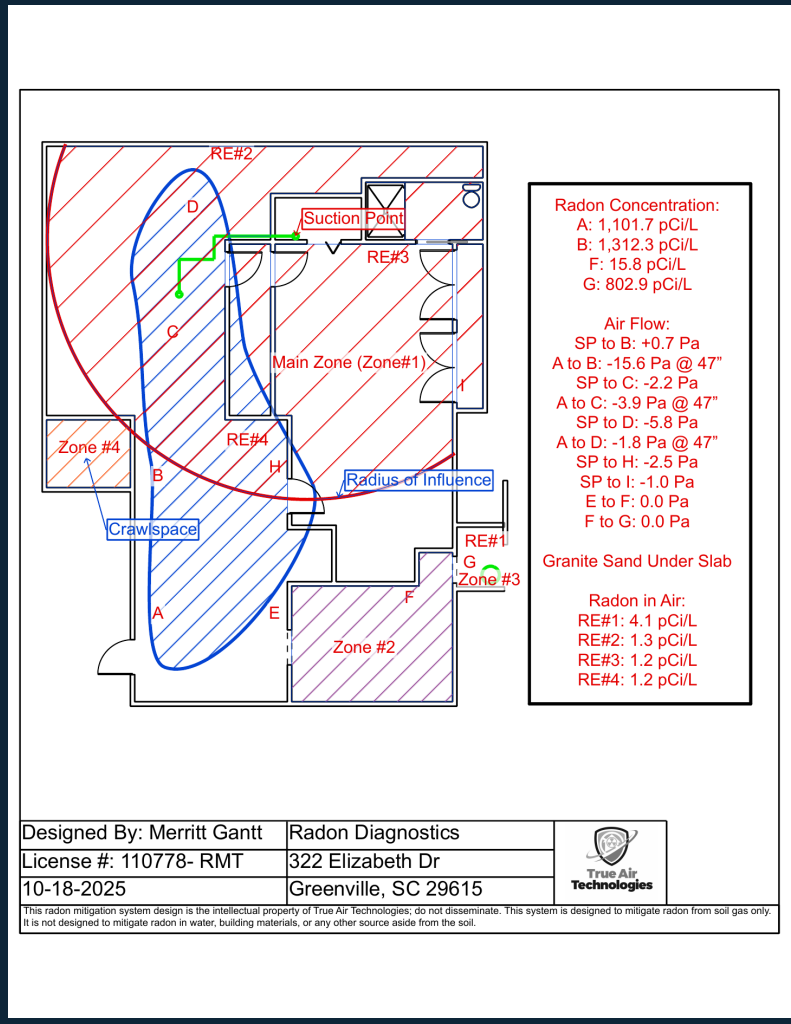

Another contractor's system was not working. The diagnostic drawing revealed what was happening.

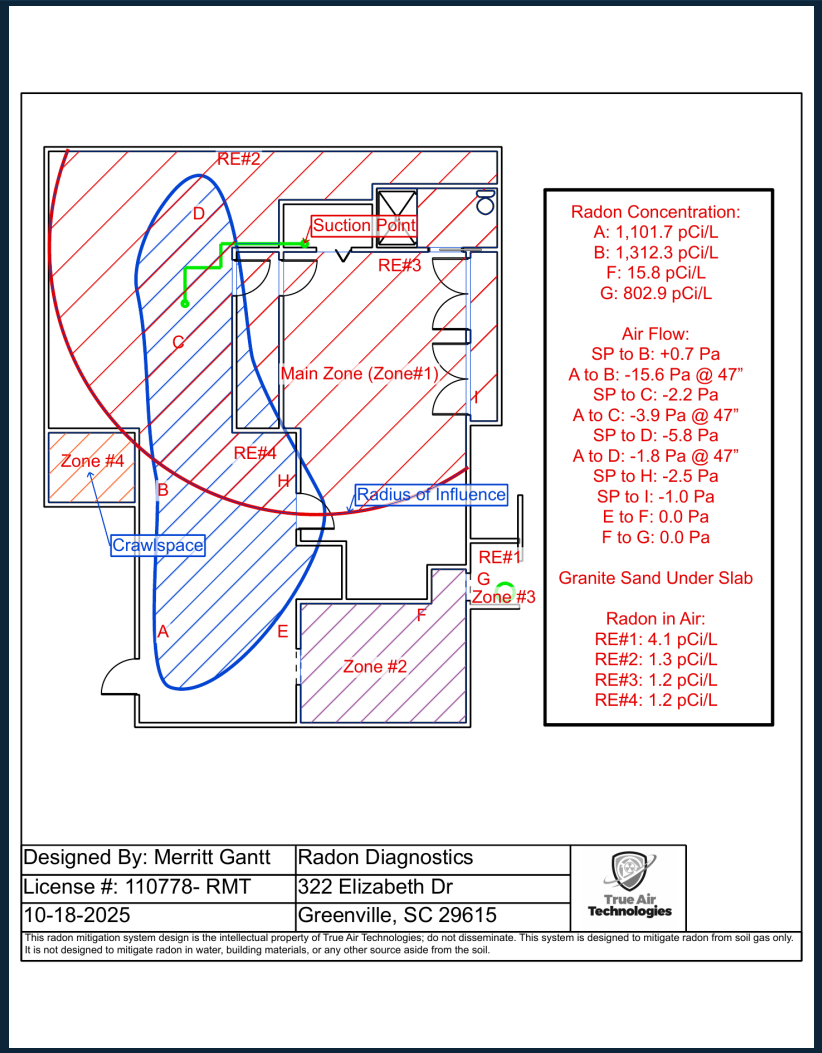

What the drawing captured

- Multiple foundation zones plus crawlspace influence
- Sub-slab radon concentrations up to 1,312.3 pCi/L
- Pressure response and radius of influence mapped to the plan
- Granite sand under slab: restrictive, uneven communication
- Indoor monitor locations: RE#1–RE#4


This is where a floor plan becomes a diagnostic record.

The post-mitigation drawing documented the modifications and final pressure results.

What changed


- Re-dug the original suction point
- Added sub-membrane depressurization in the crawlspace
- Recorded RN4EC @ 44 watts and fan @ 1.8" w.c.
- Recorded post-mitigation pressure responses at A–E

Now the project has a before-and-after record.

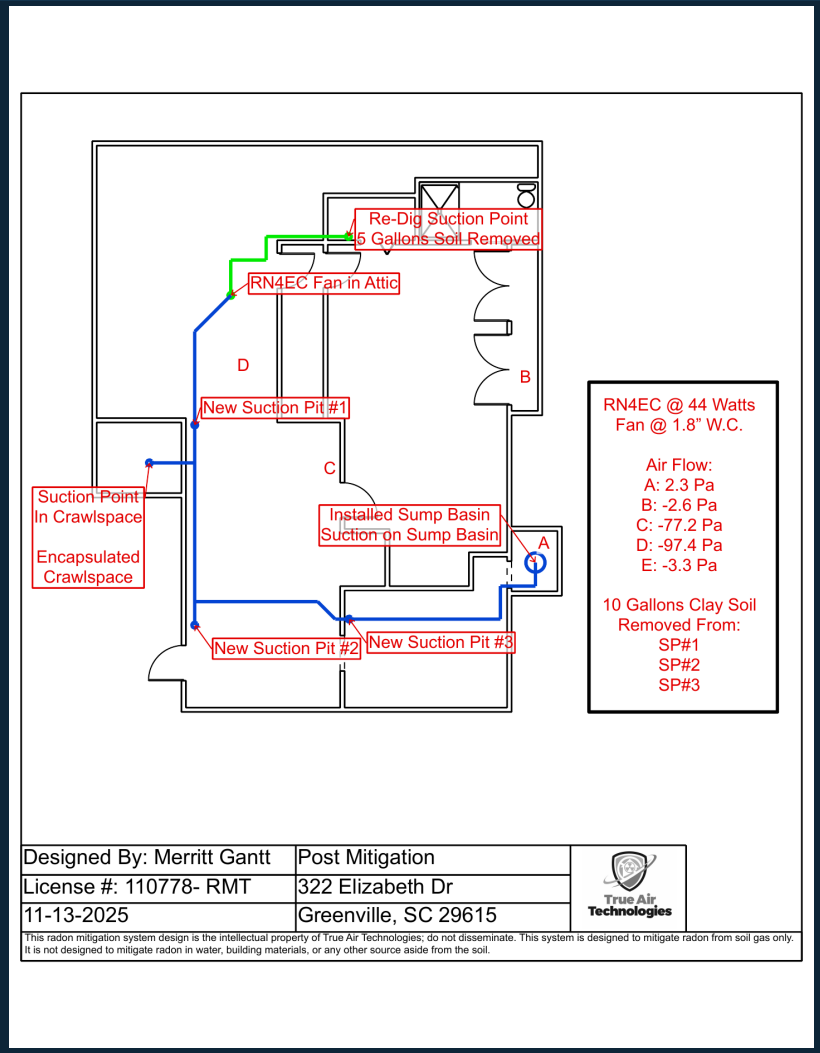

My Evolution:
Grid paper → Draft Paper → SketchUp → ArcSite.

The tool matters less than the habit of documenting well.

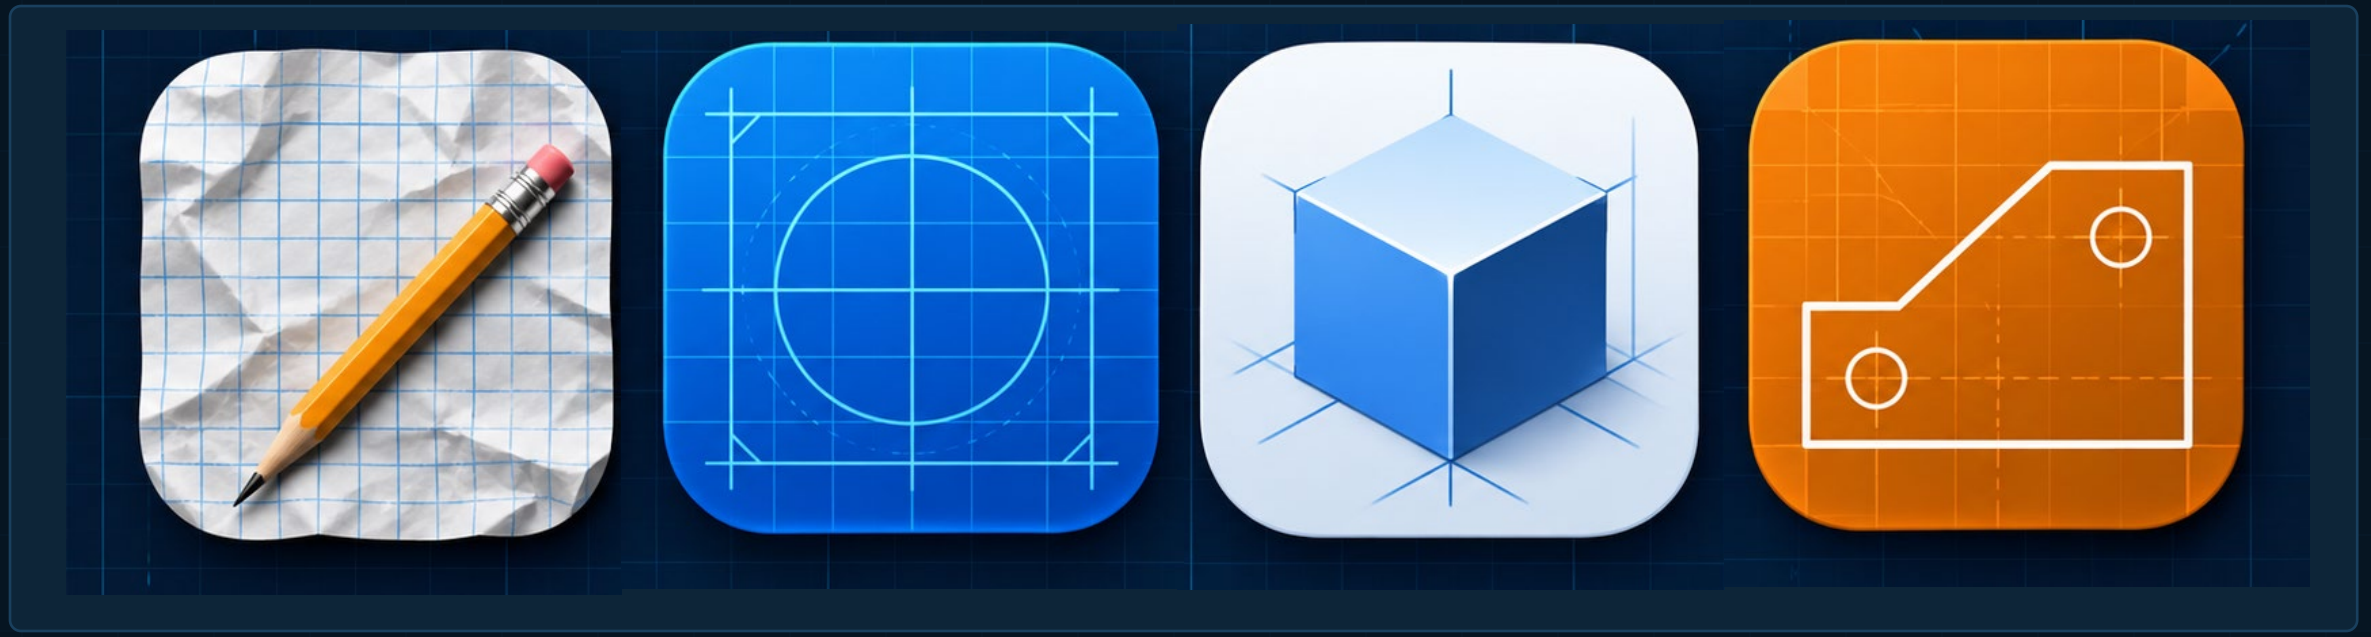



Grid paper | **Draft Paper App** | **SketchUp** | **ArcSite**


Use whatever tool lets you create, preserve, retrieve, and share the information.

Grid Paper/ Hand Drawings:

- Simple, but easy to lose, damage, or spill coffee on.

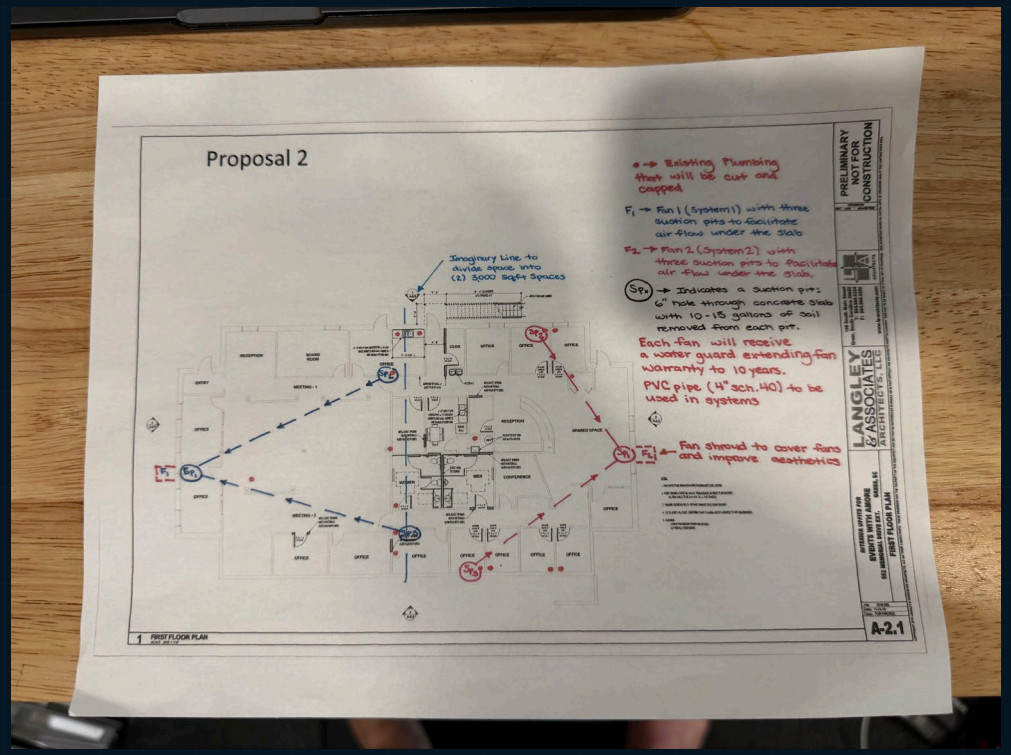


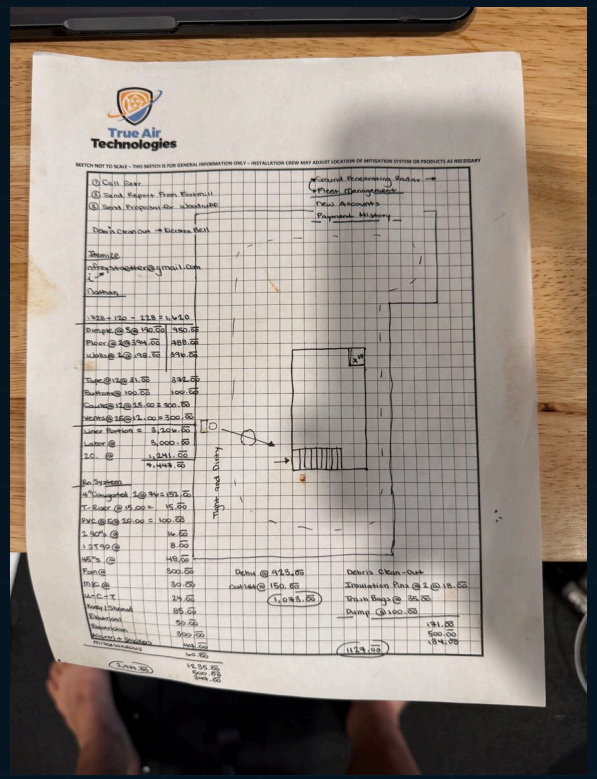


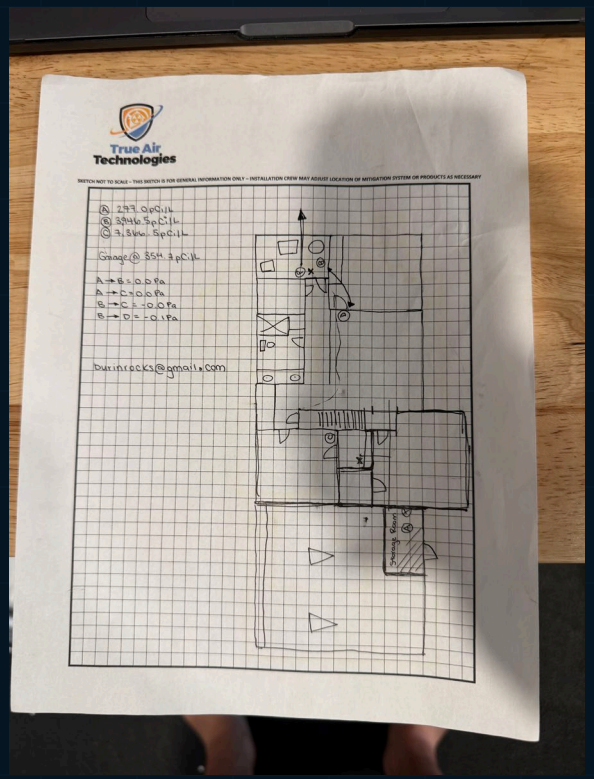


Draft Paper App:

- Digital Documentation, Easy To Use, Free
- No Option to Export Drawings, More Primitive

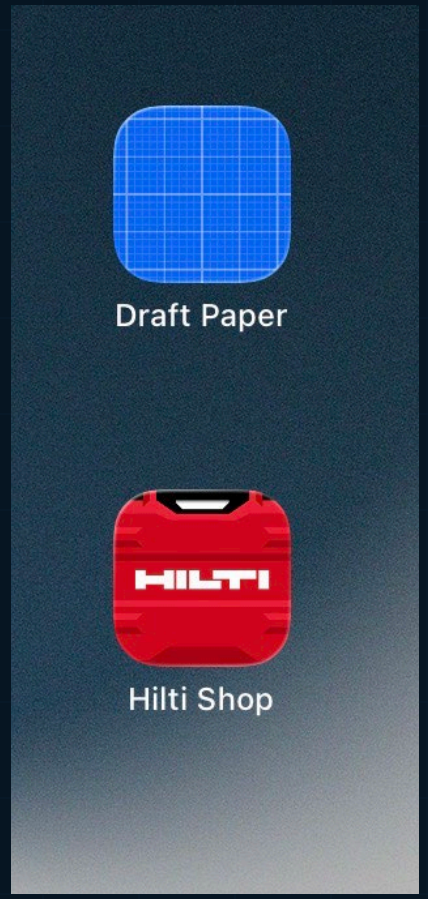


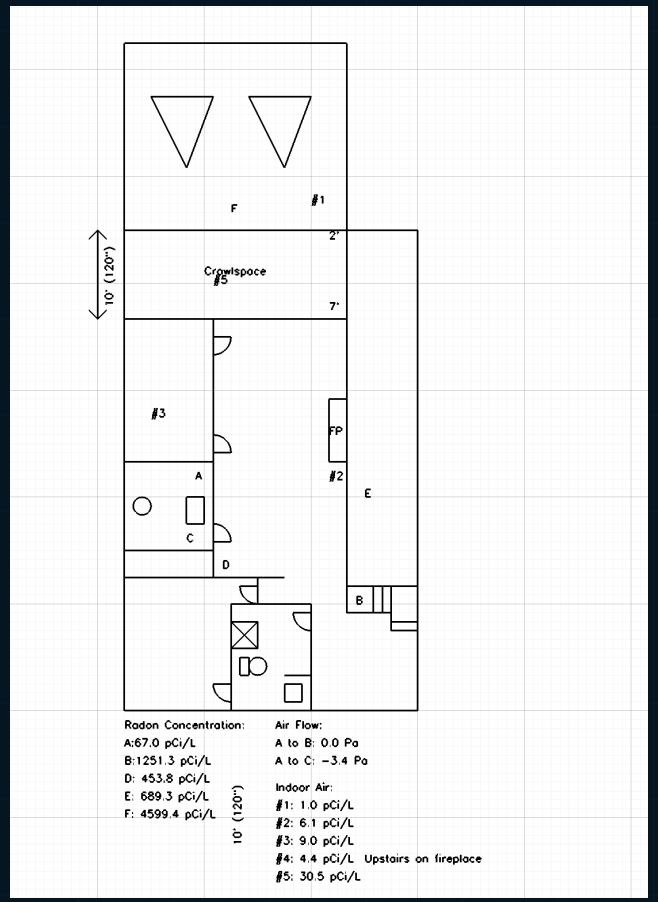


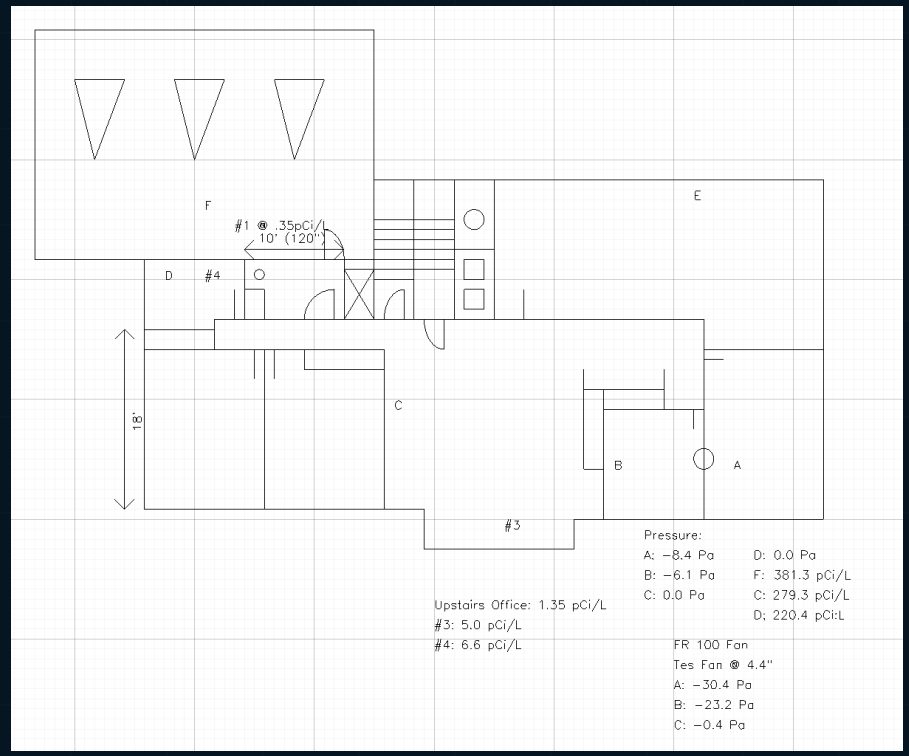


Sketchup:

- Digital Documentation, Creative Illustration, More Professional
- Drawings Only Exported as PDF, Time Consuming, Expensive

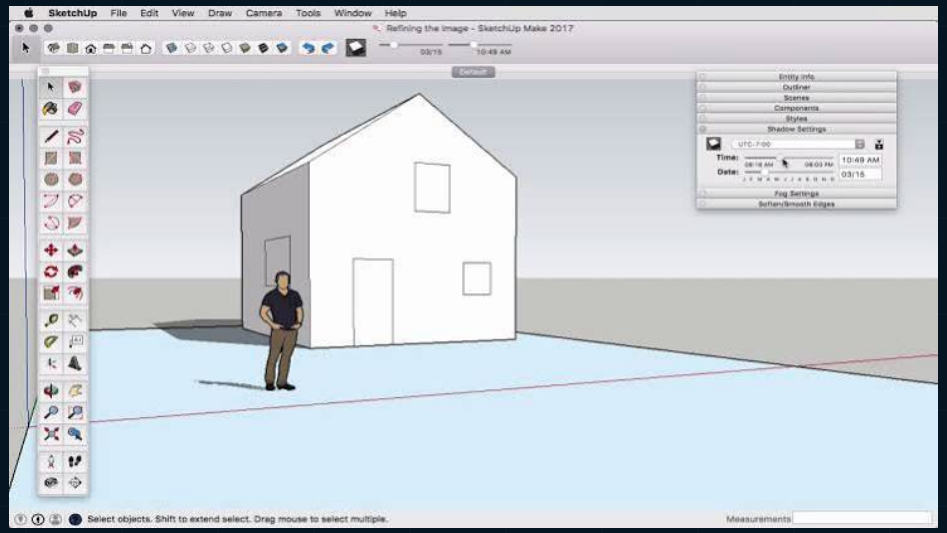


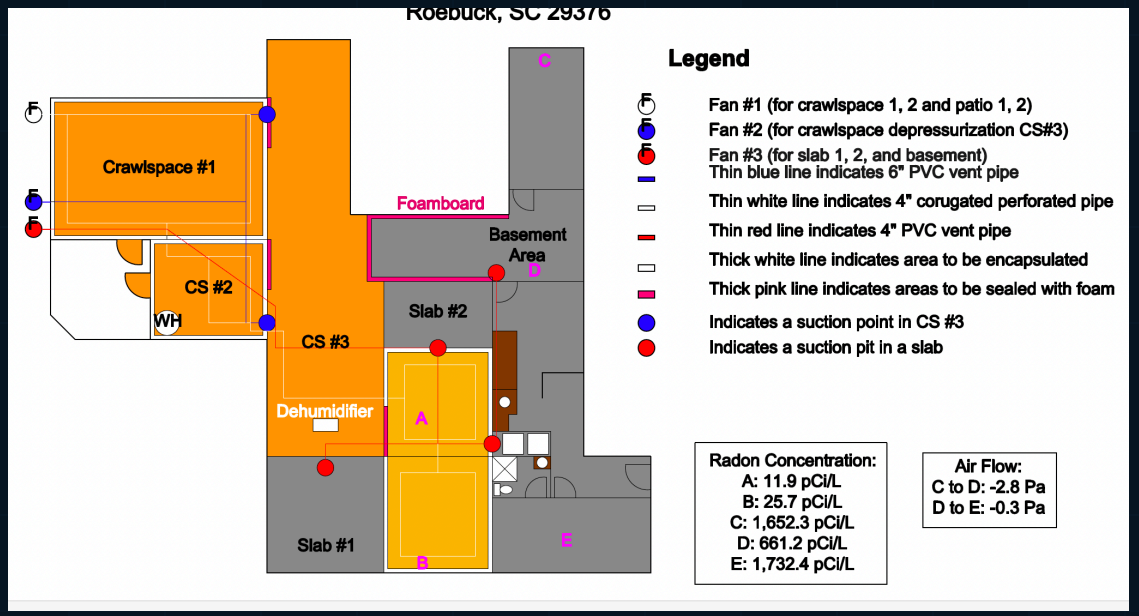


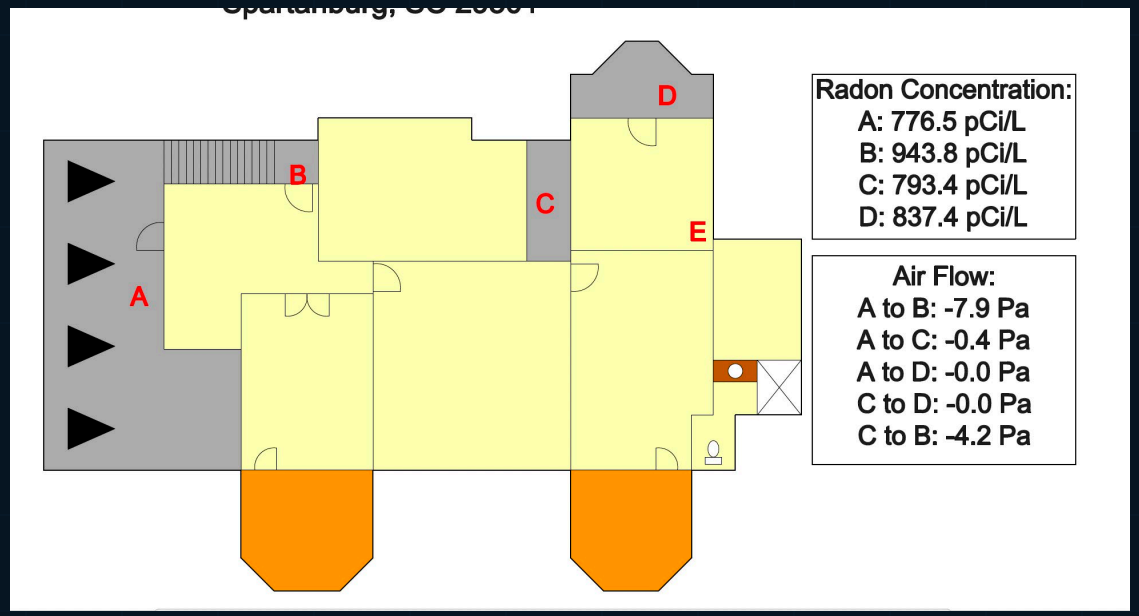


ArcSite:

- Digital Documentation, Creative Illustration, More Professional, Better Record Keeping, Layers, Title Blocks, Can Export as PDF, PNG, AutoCAD DXF, or DWG, Features like LiDAR for faster drawings
- Expensive

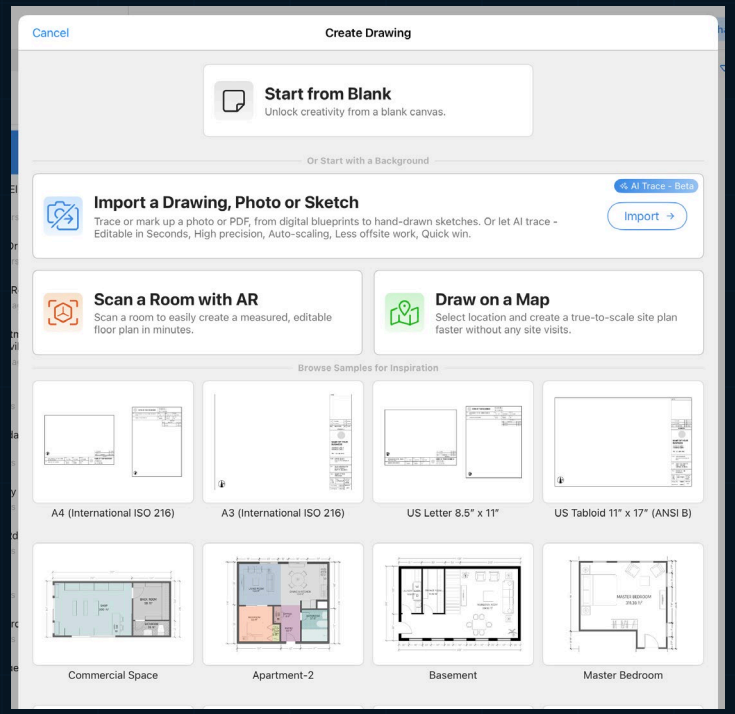

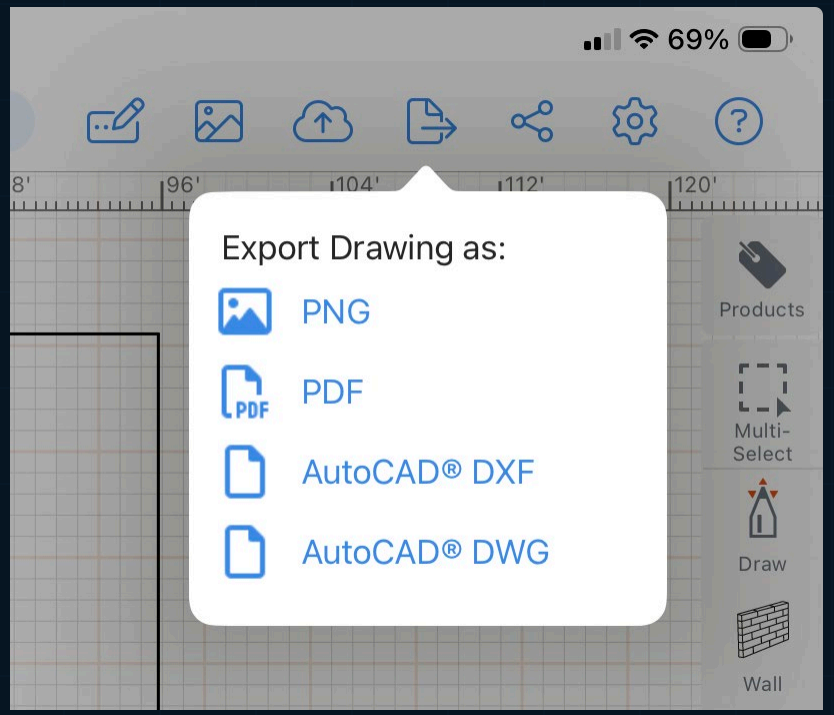

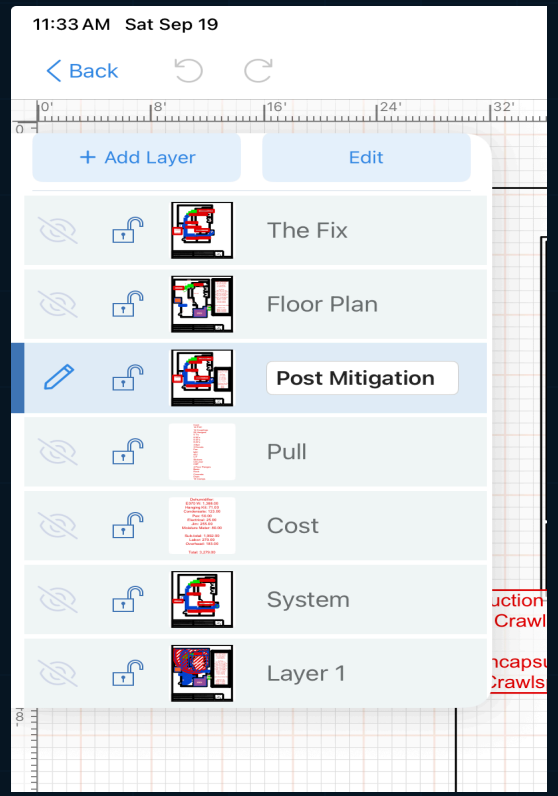


DRAW THE HOME

BEFORE YOU MITIGATE THE HOME.

Better Diagnostics
Better Designs
Better Communication
Better Documentation

Make Your Floor Plans A More Valuable Tool In Your Toolbelt!

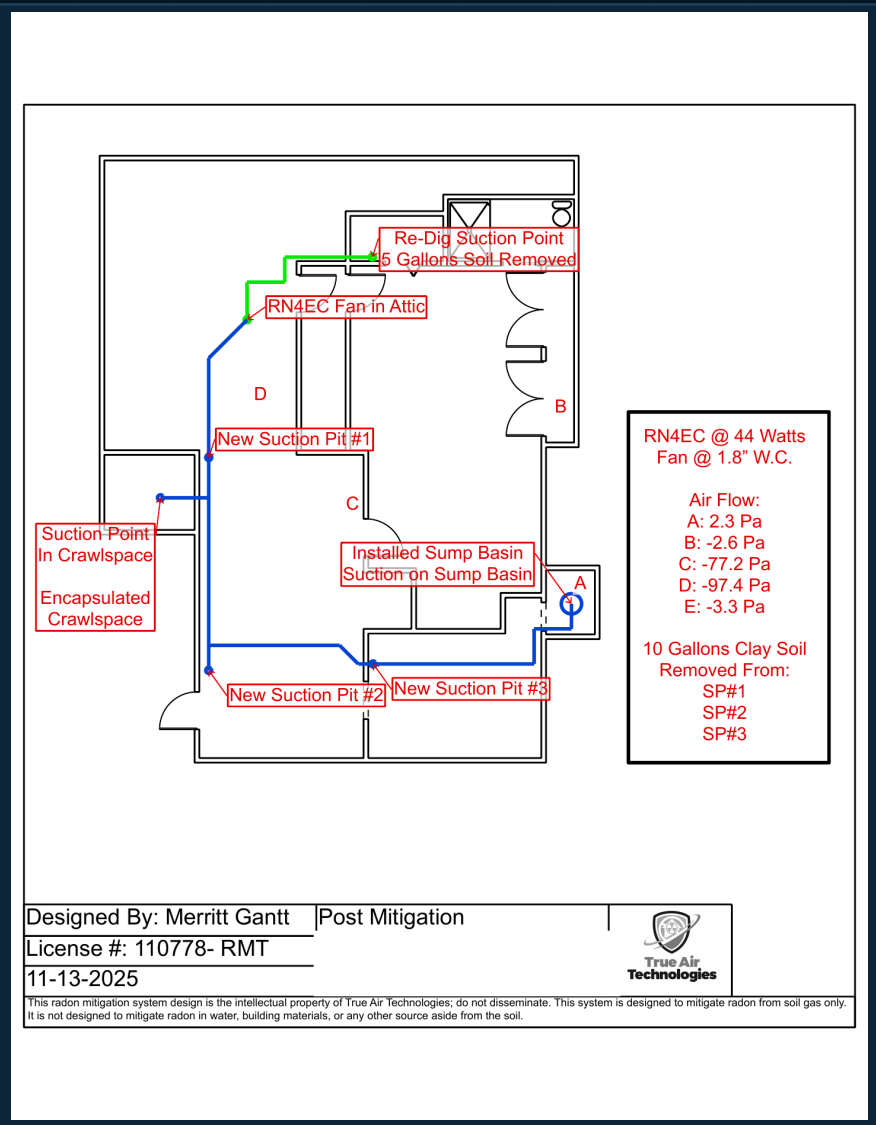

What is the most useful radon mitigation tool that you own?

What if your floor plan became your most useful diagnostic tool?

DRAW THE HOME
BEFORE YOU MITIGATE THE HOME



A floor plan is not just a standard requirement…

It is a working tool for the entire project.

Diagnose better: test points, PFE data, foundation zones, materials, and observations in context.

Design better: suction points, pipe routes, fan selection, and phasing based on mapped evidence.

Communicate better: show the customer what you found and what you plan to do.


Document better: keep installation data and callback information tied to the house.





The drawing becomes the backbone of the job.

DIAGNOSTICS:

PFE Data, Radon Grab Samples, Foundation Zones, Footings, Building Materials, Soil Type, Foundation Drains, Odd Things…Whatever Might Impact The Radon Mitigation System

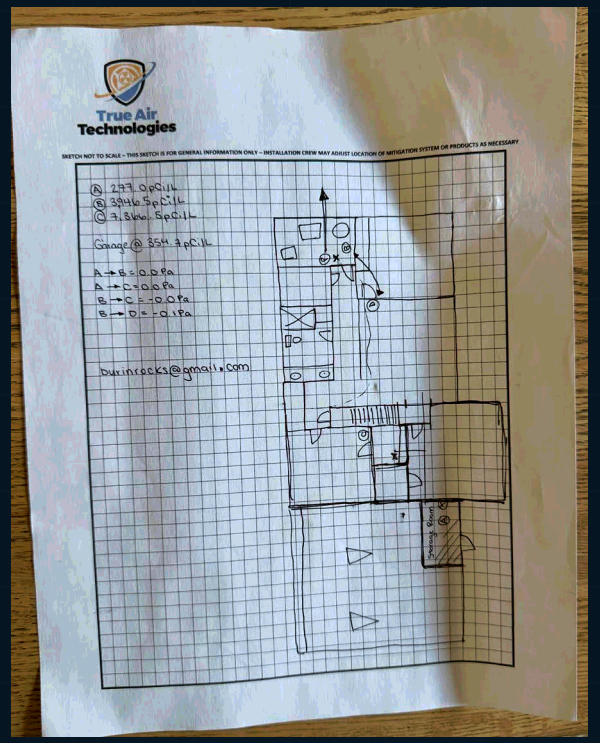


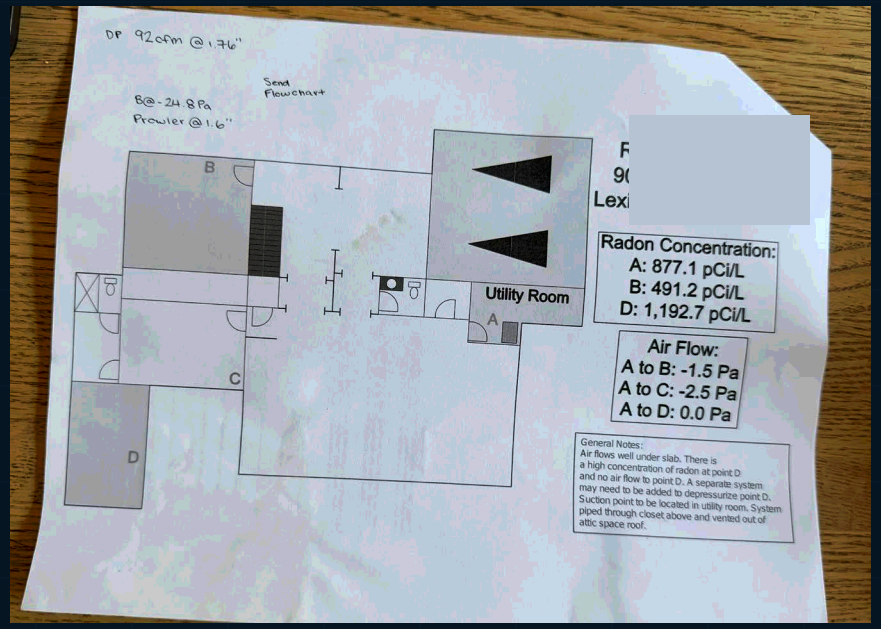


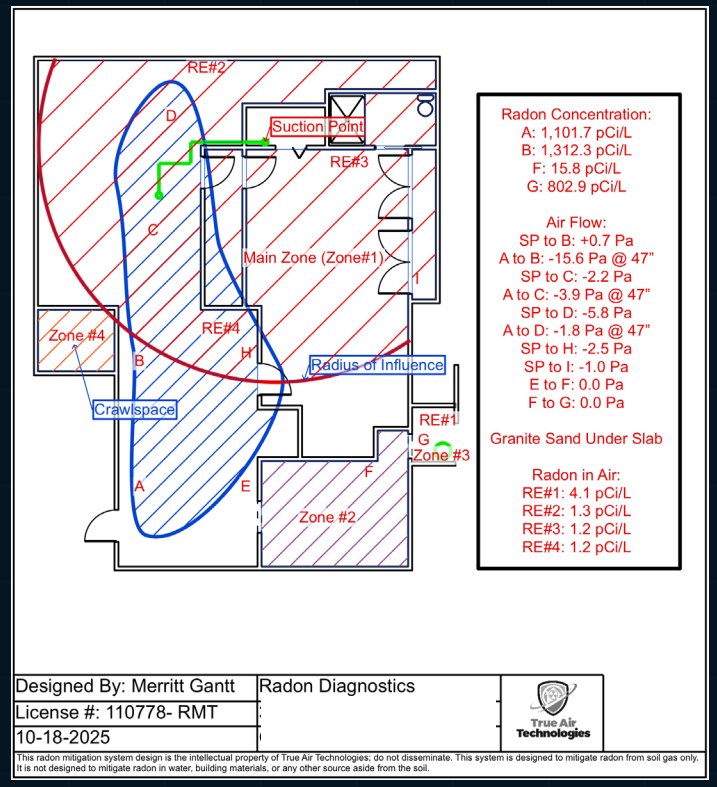


DESIGN:

Pipe Runs, System Type(s), System Location (Exterior vs Interior), Points to Seal/Caulk, Number and Location of Suction Points, PFE Data, etc.

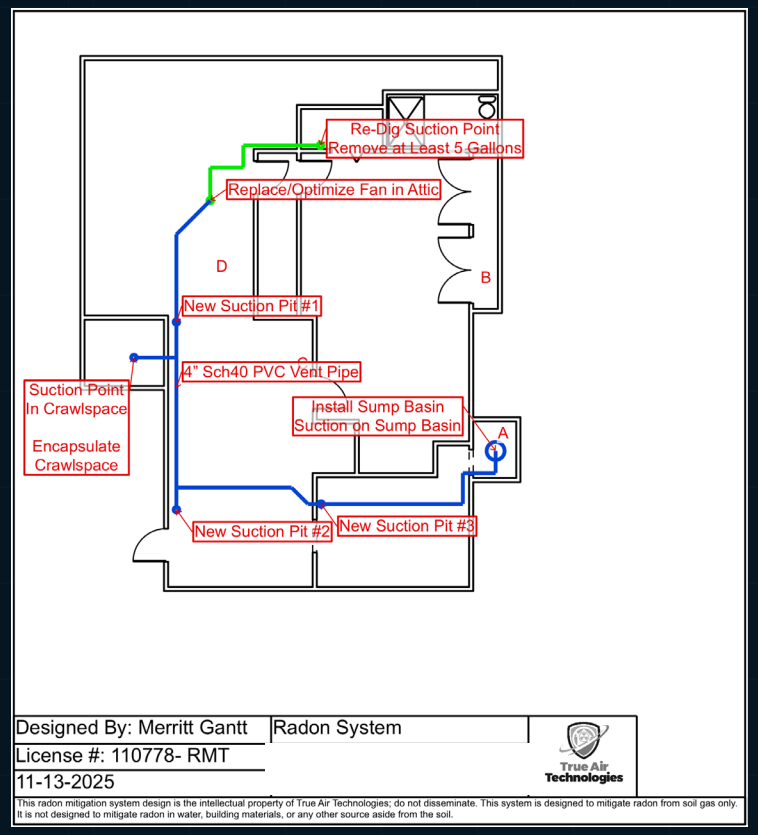


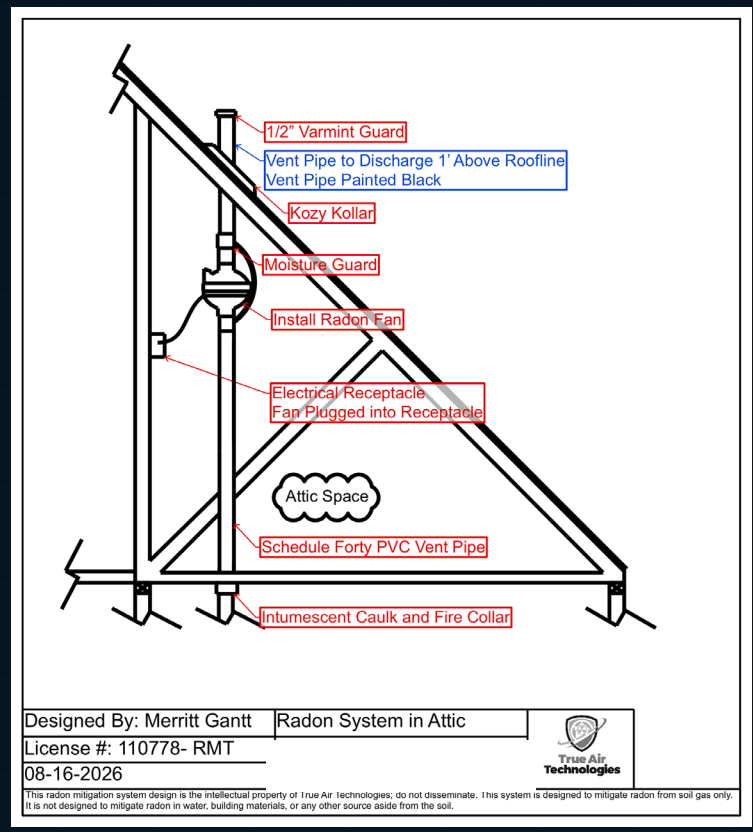


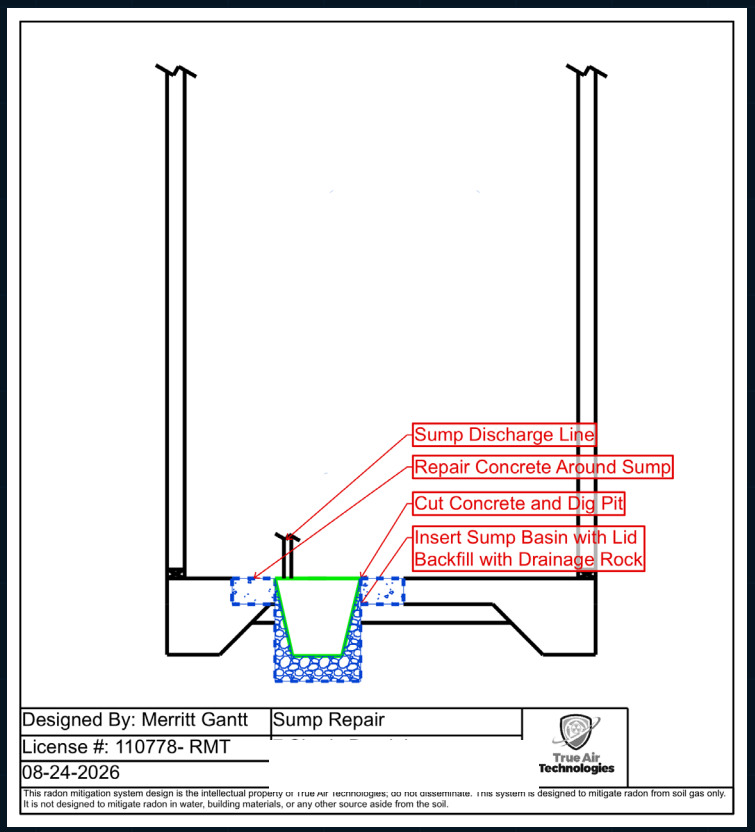

COMMUNICATE:

This is where your project goes from a house that you are looking at…to a home you are fixing!
This is your opportunity to present to the customer, your findings, and how you plan to fix it.

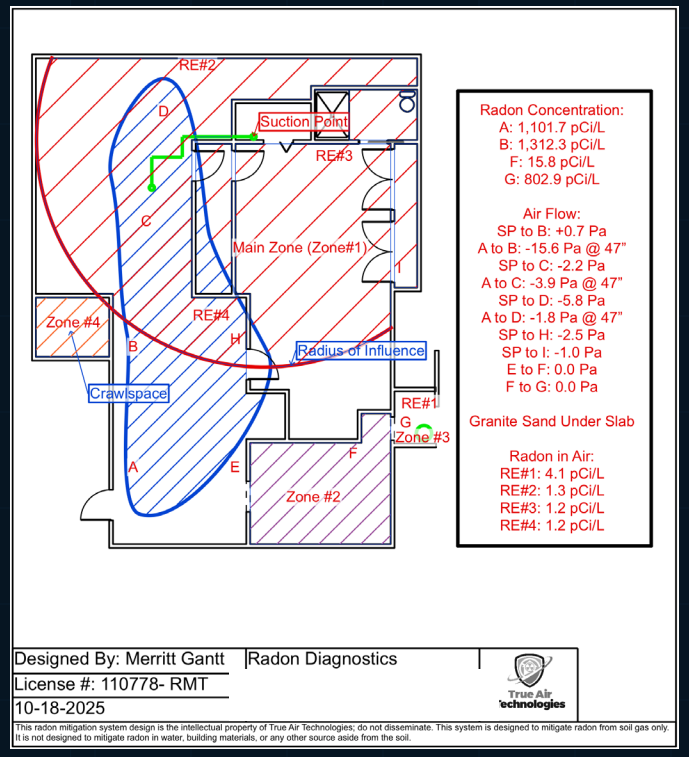

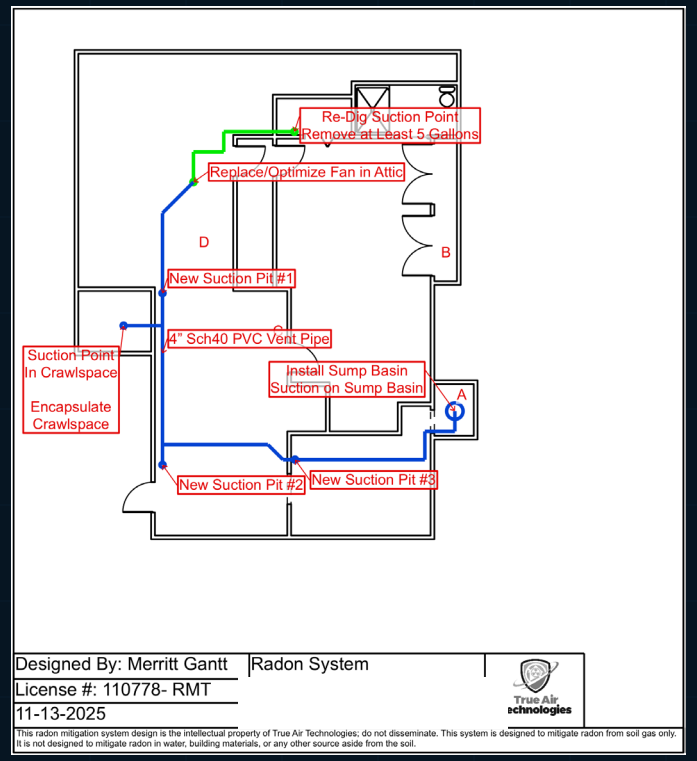



The drawing shows the homeowner what you found, what you recommend, and why.

FOUND
Here is where radon is likely entering… There is a footing under the slab…

REASON
We need X,Y,Z Radon System…And, Here's Why…


PLAN
Here is exactly what we plan to install...



A drawing turns an invisible problem into something the customer can see.

DOCUMENT:

- Job Notes/Observations (SP 1: 5 Gallons Drainage Rock), PFE Data, etc.
- OMM Plans
- Call Backs, Fan Failures, High Radon…Future You Will Thank You

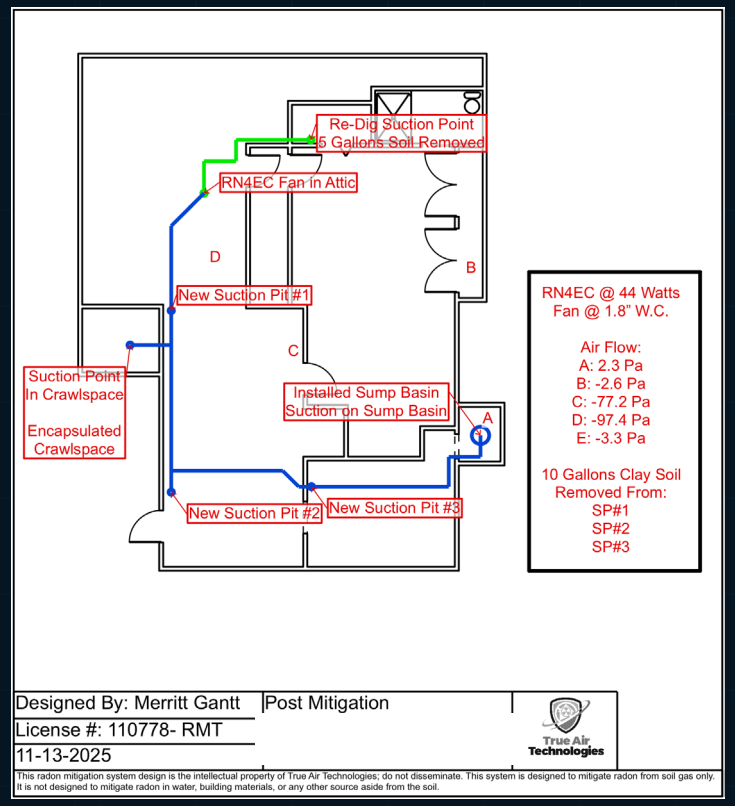



"What did I do again"



Years later, the drawing preserves the diagnostic data, installation details, and system performance.

CALLBACK WITHOUT A DRAWING

“I think we had a fan in the attic… maybe one suction point… I don’t remember what the pressure was.”

Memory fades.


CALLBACK WITH A DRAWING


RN4EC @ 44 watts
Fan @ 1.8" w.c.
Re-dug original SP: 5 gallons removed
SP#1–#3: 10 gallons clay removed
Post-mitigation PFE: A–E recorded

The drawing is the institutional memory of the job.

TROUBLESHOOT:

Ever Needed Help on a Project/Difficult Home?

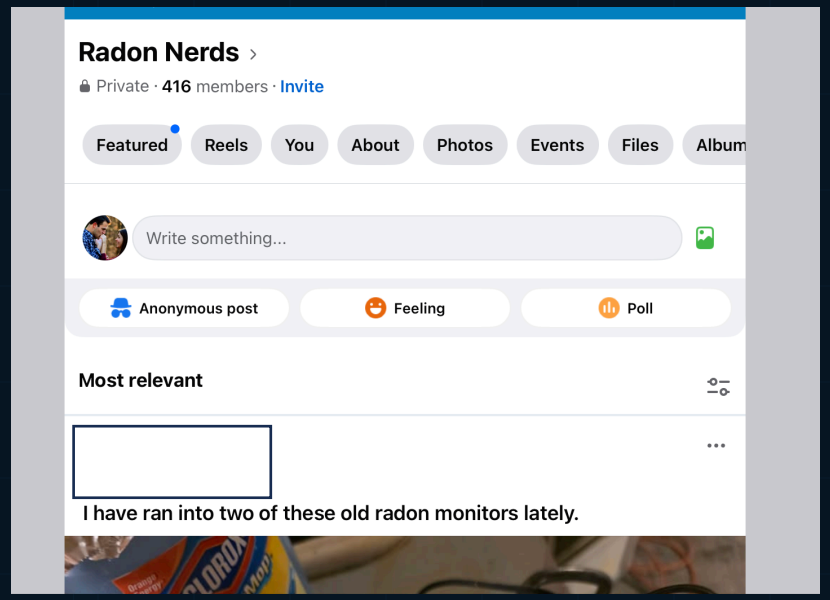

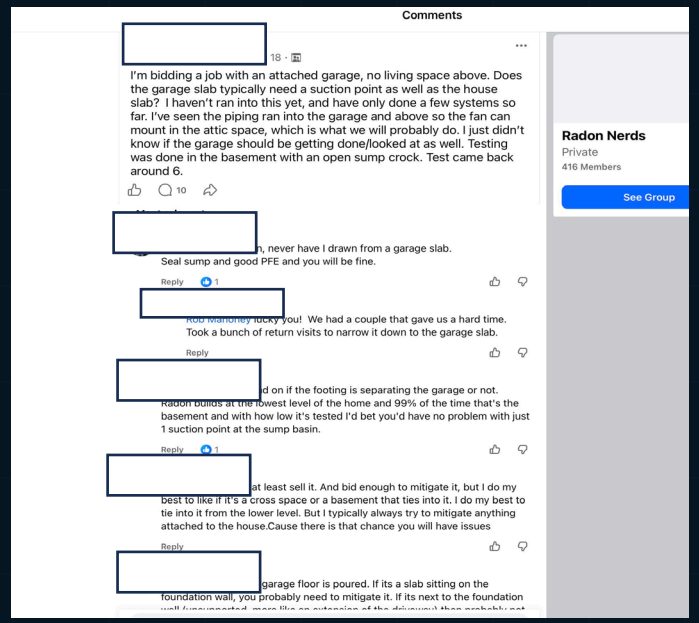



"I Don't Even Know Where to Start"

A good drawing lets other professionals understand the project quickly.


Solves the “crickets” problem

“What does your PFE look like?”


“What are the foundation zones?”

“Where are the footings?”

You cannot collaborate on information you didn’t record and don’t remember

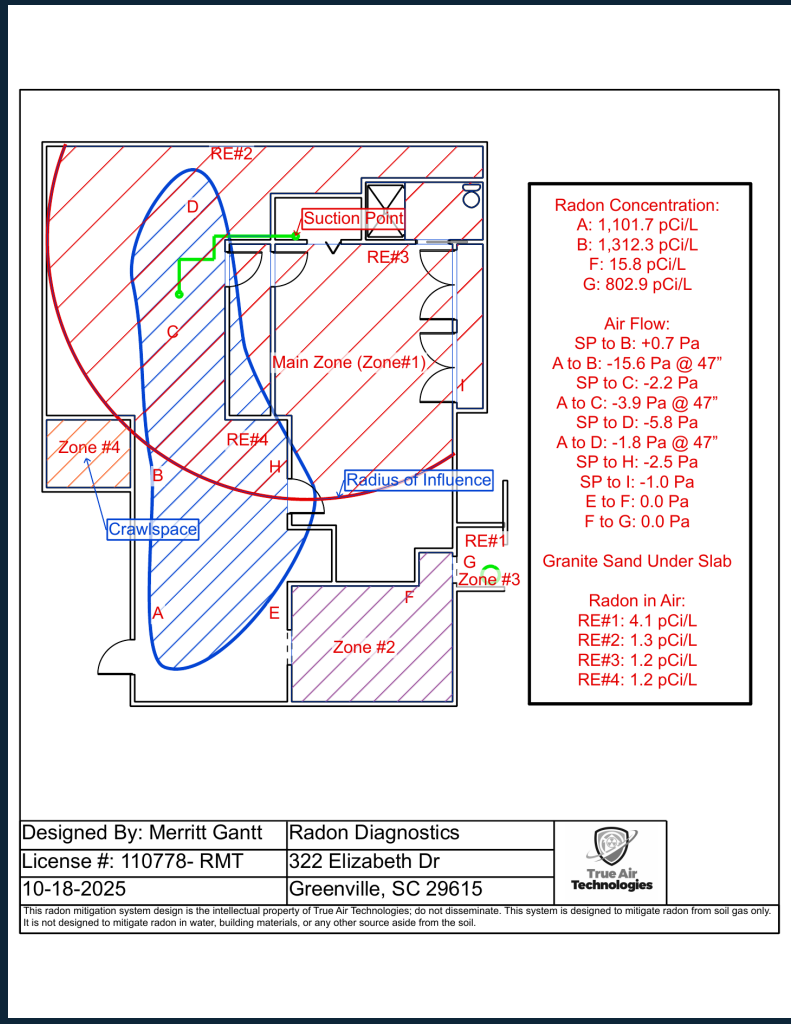

Another contractor's system was not working. The diagnostic drawing revealed what was happening.

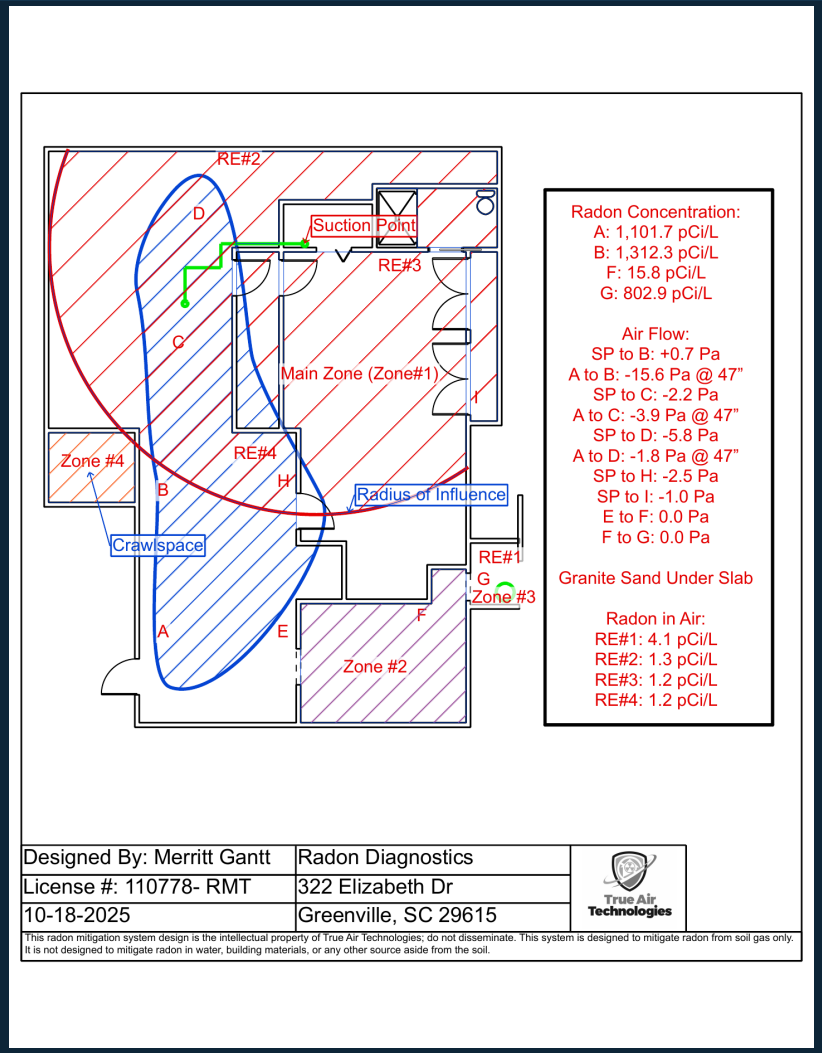

What the drawing captured

- Multiple foundation zones plus crawlspace influence
- Sub-slab radon concentrations up to 1,312.3 pCi/L
- Pressure response and radius of influence mapped to the plan
- Granite sand under slab: restrictive, uneven communication
- Indoor monitor locations: RE#1–RE#4


This is where a floor plan becomes a diagnostic record.

The post-mitigation drawing documented the modifications and final pressure results.

What changed


- Re-dug the original suction point
- Added sub-membrane depressurization in the crawlspace
- Recorded RN4EC @ 44 watts and fan @ 1.8" w.c.
- Recorded post-mitigation pressure responses at A–E

Now the project has a before-and-after record.

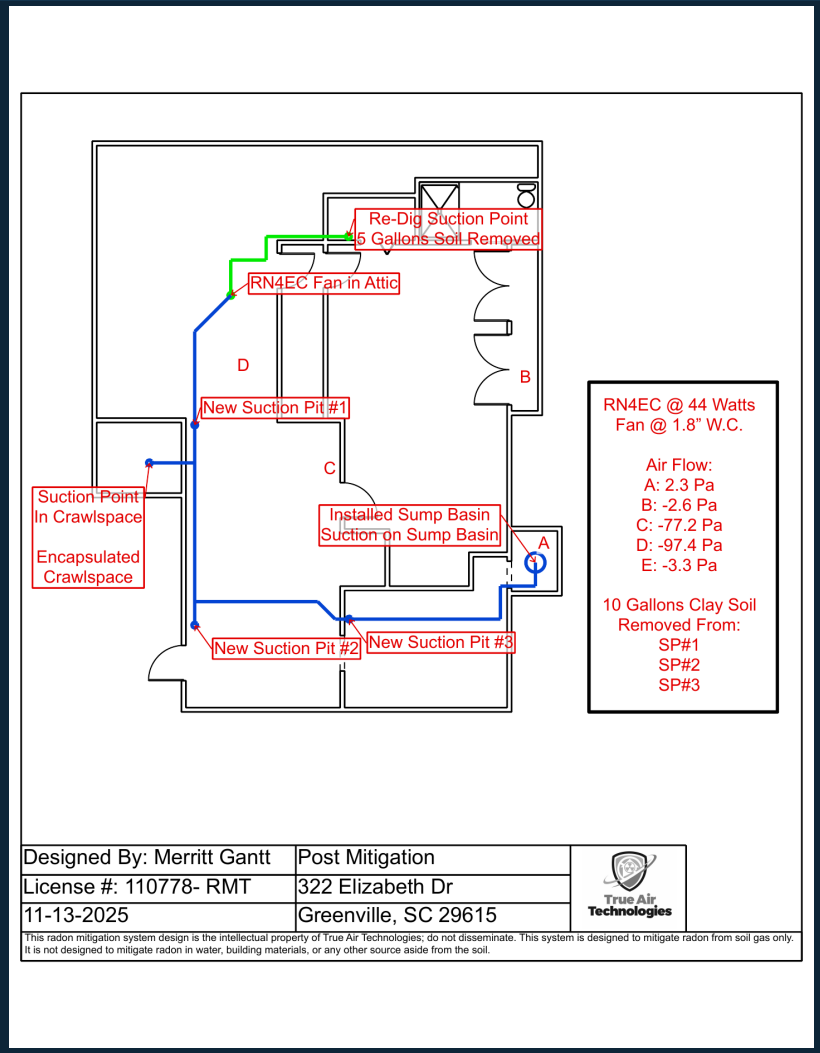

My Evolution:
Grid paper → Draft Paper → SketchUp → ArcSite.

The tool matters less than the habit of documenting well.

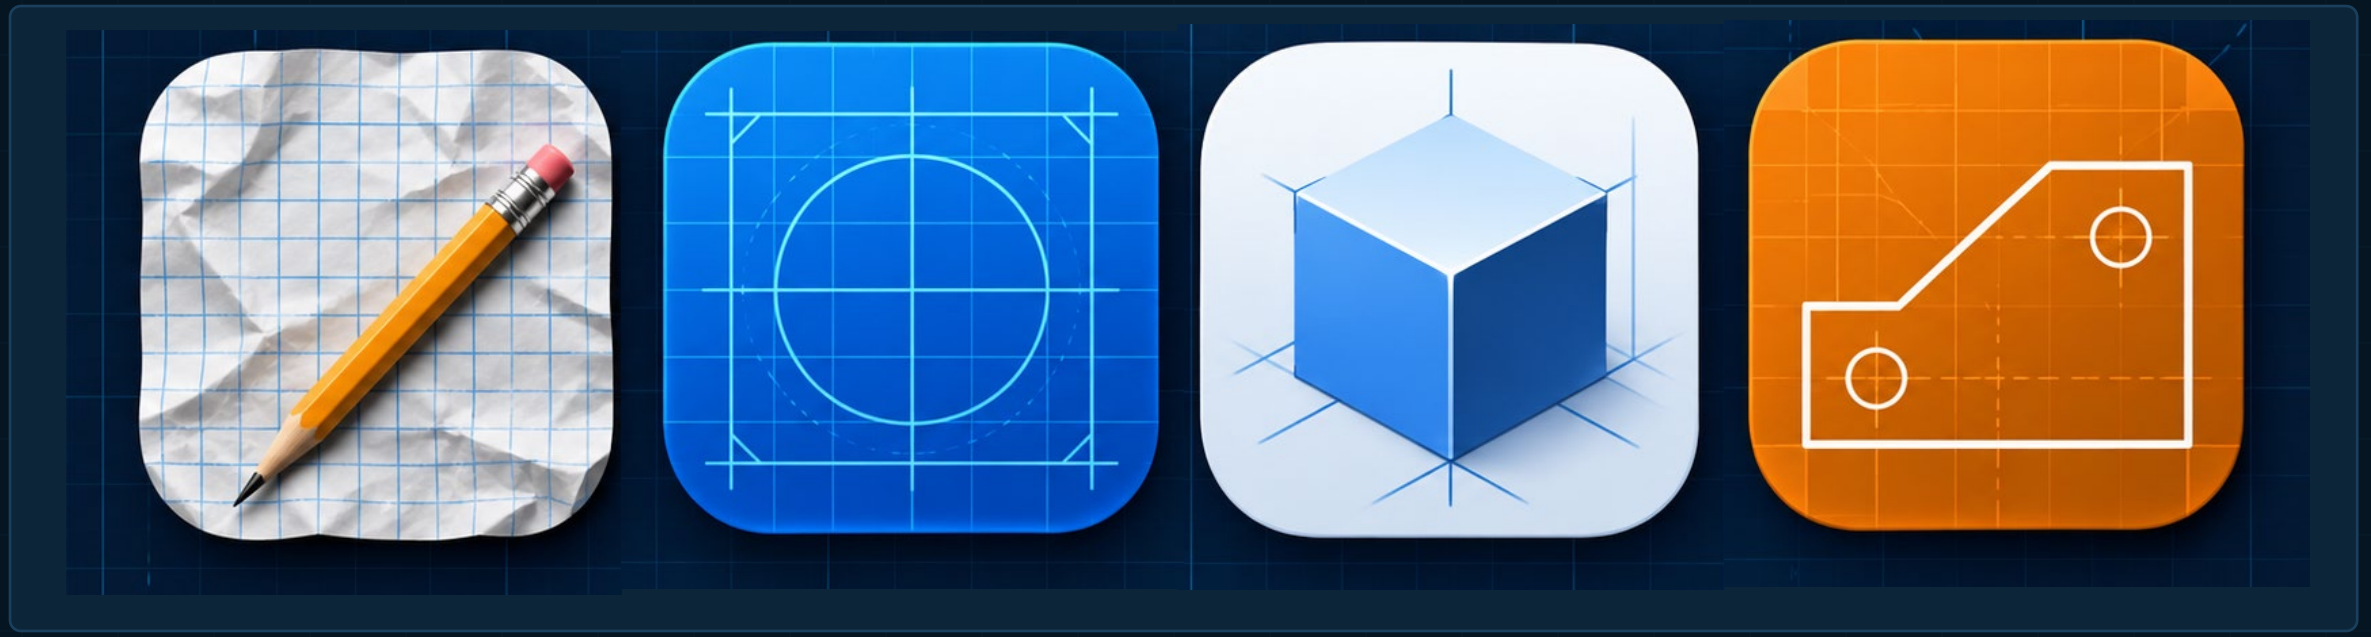



Grid paper | **Draft Paper App** | **SketchUp** | **ArcSite**


Use whatever tool lets you create, preserve, retrieve, and share the information.

Grid Paper/ Hand Drawings:

- Simple, but easy to lose, damage, or spill coffee on.

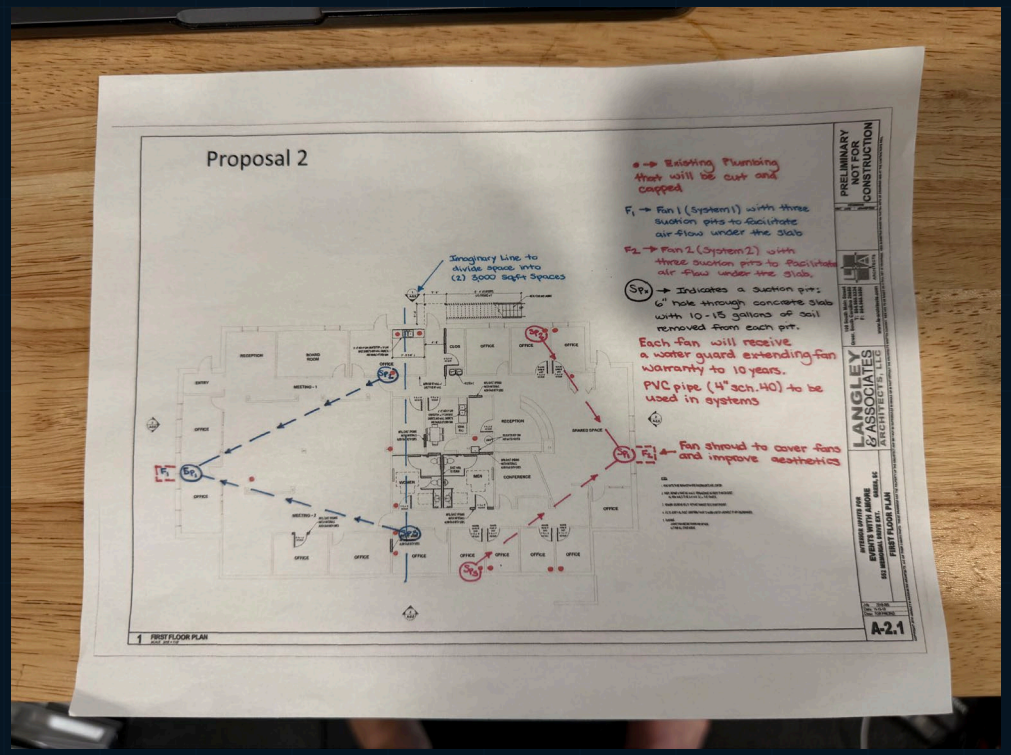


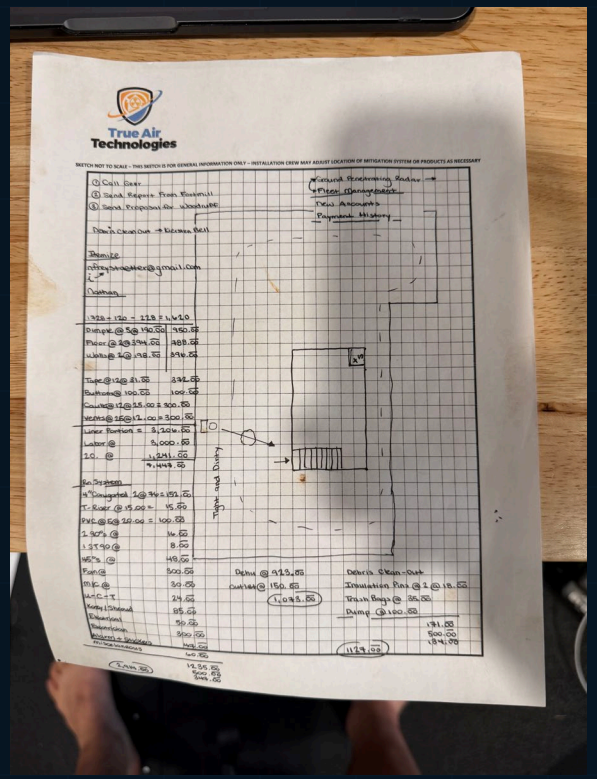


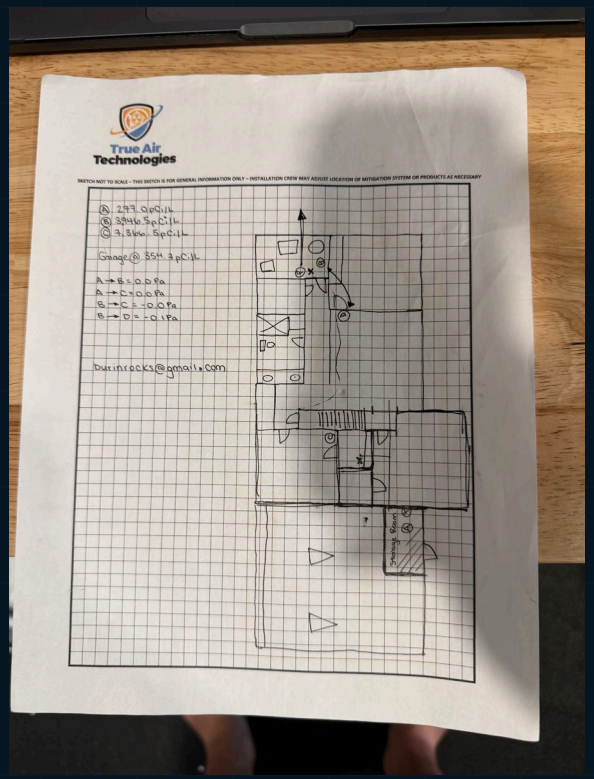


Draft Paper App:

- Digital Documentation, Easy To Use, Free
- No Option to Export Drawings, More Primitive

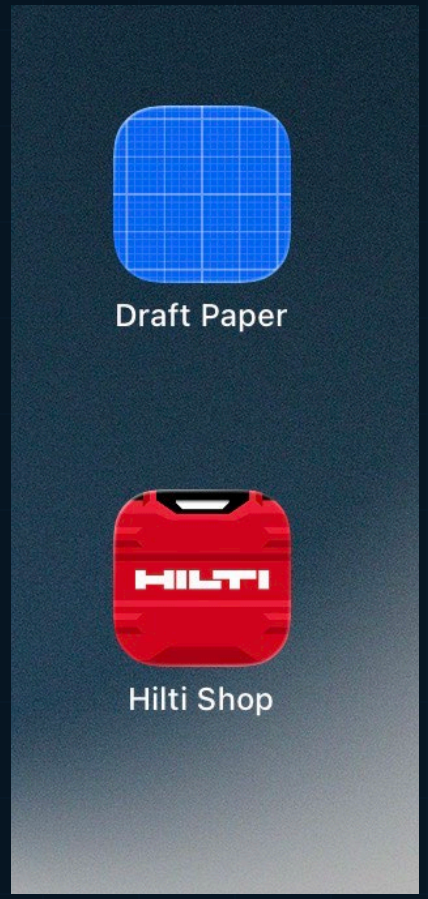


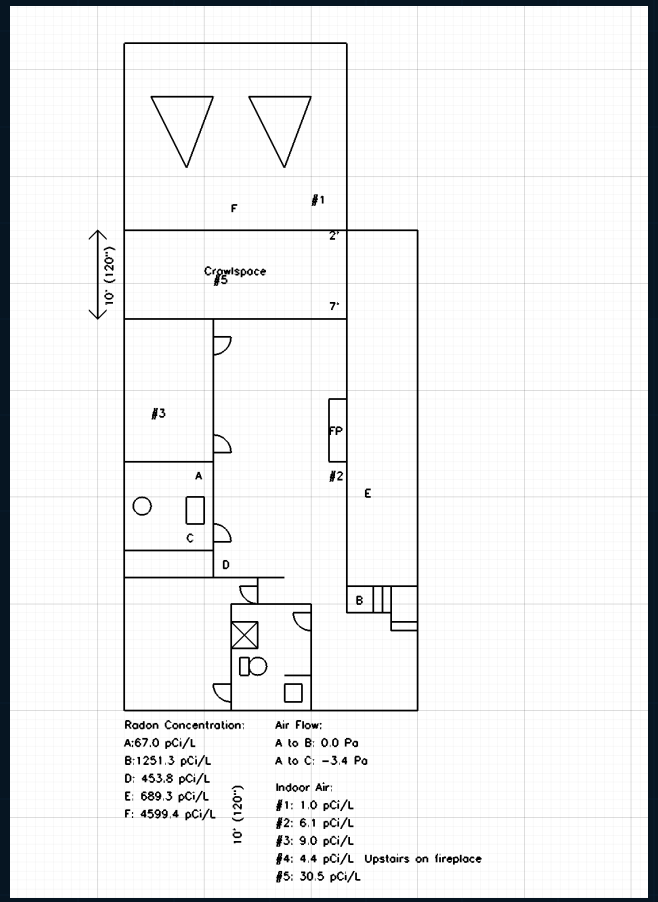


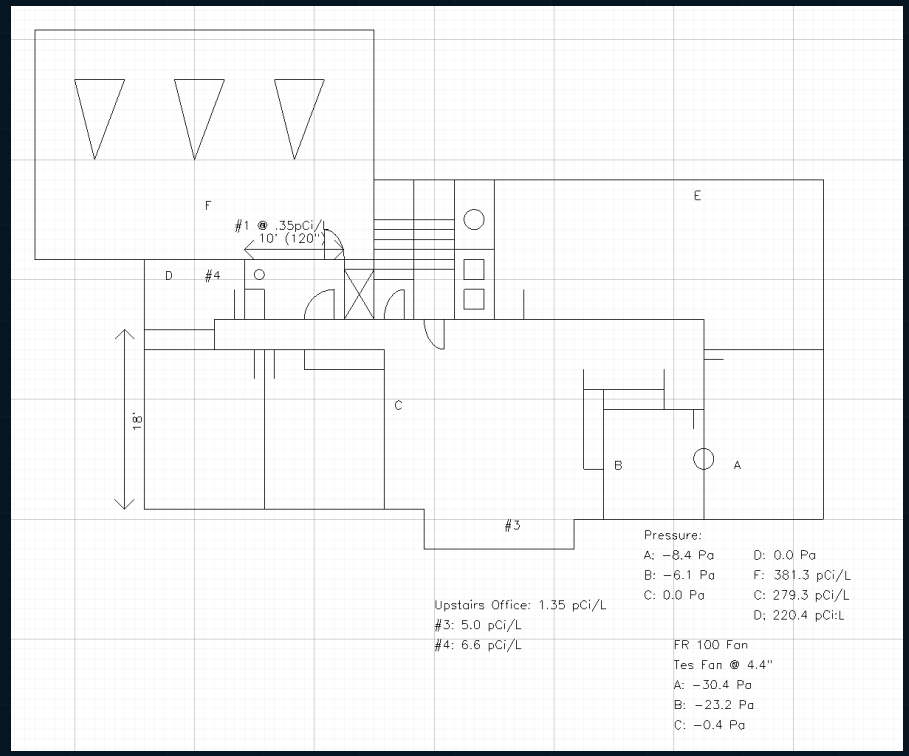


Sketchup:

- Digital Documentation, Creative Illustration, More Professional
- Drawings Only Exported as PDF, Time Consuming, Expensive

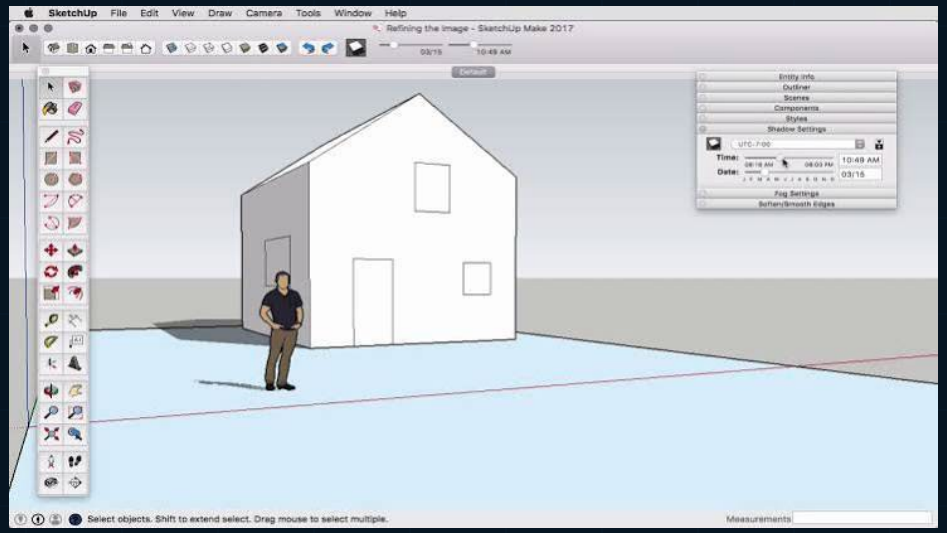


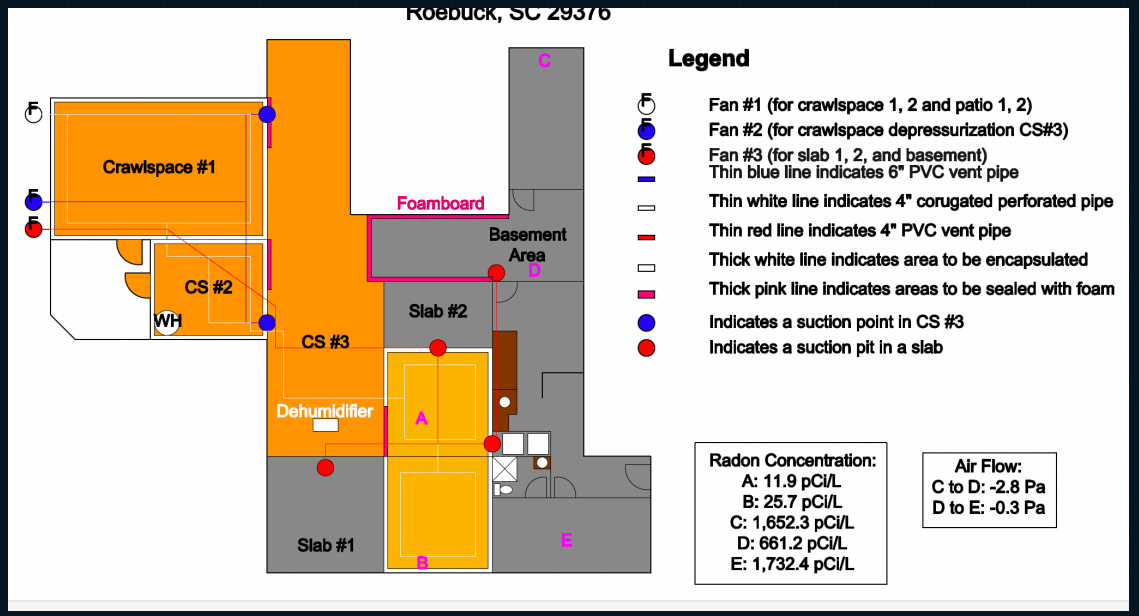


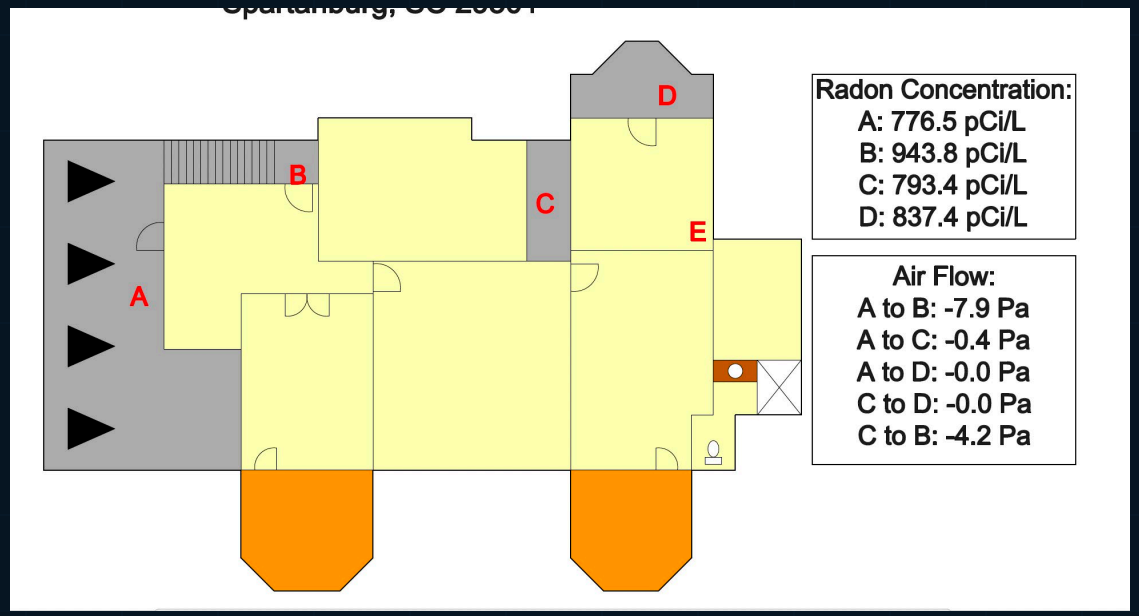


ArcSite:

- Digital Documentation, Creative Illustration, More Professional, Better Record Keeping, Layers, Title Blocks, Can Export as PDF, PNG, AutoCAD DXF, or DWG, Features like LiDAR for faster drawings
- Expensive

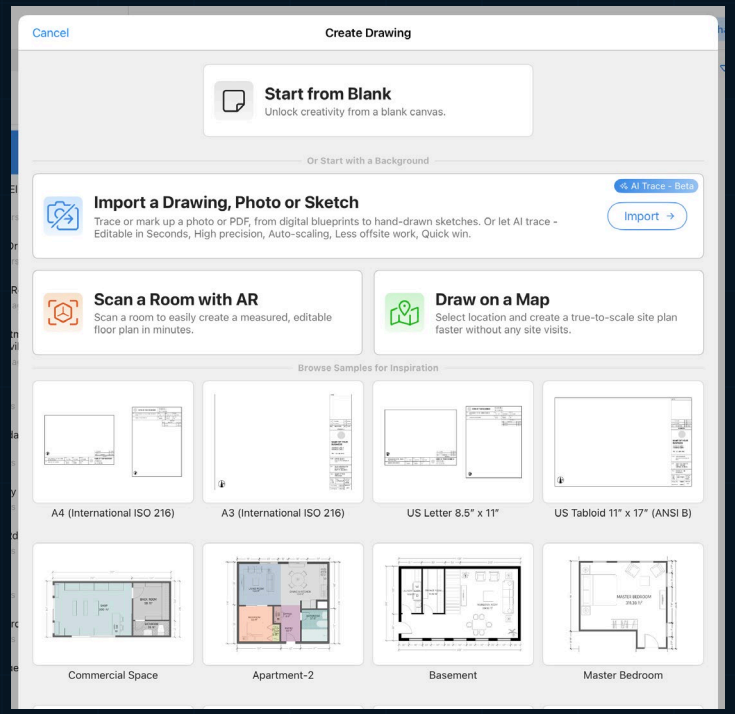

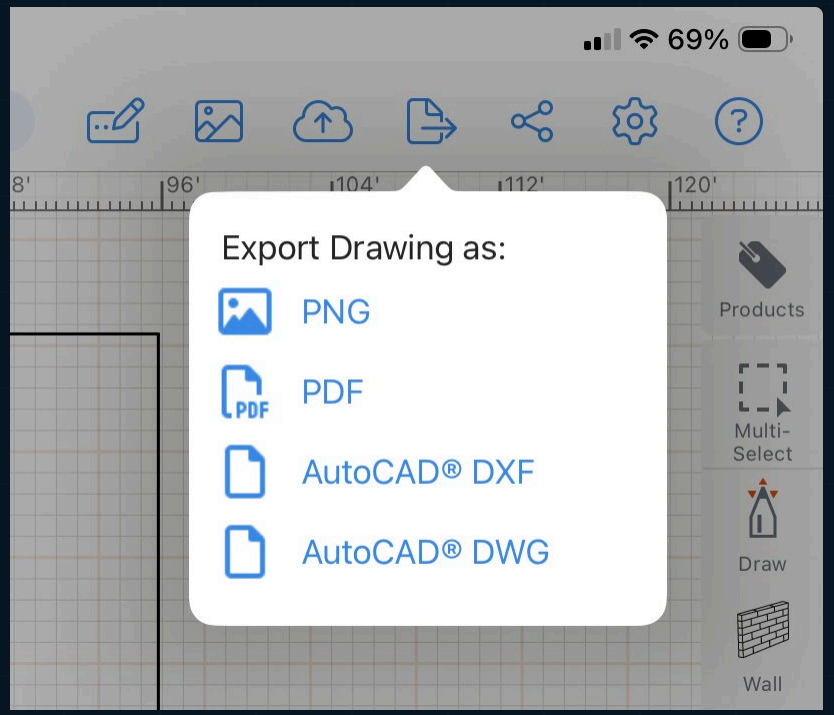

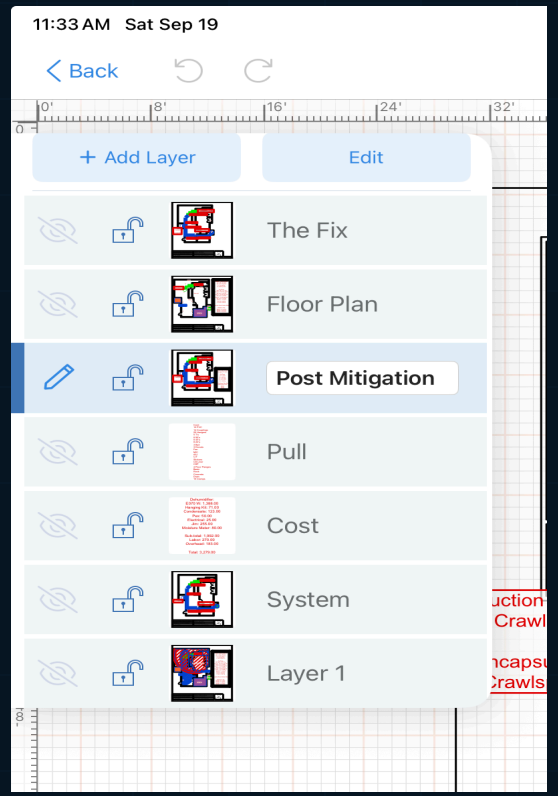

DRAW THE HOME

BEFORE YOU MITIGATE THE HOME.

Better Diagnostics
Better Designs
Better Communication
Better Documentation

Make Your Floor Plans A More Valuable Tool In Your Toolbelt!

